

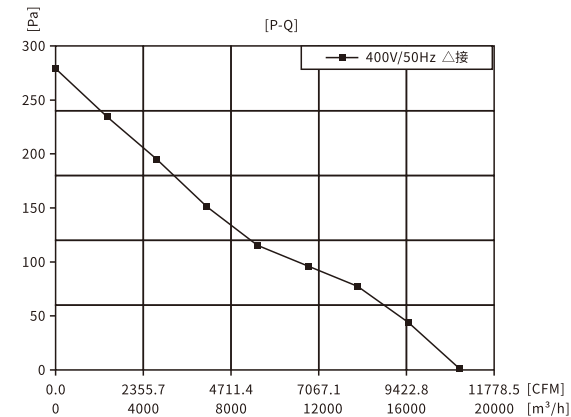


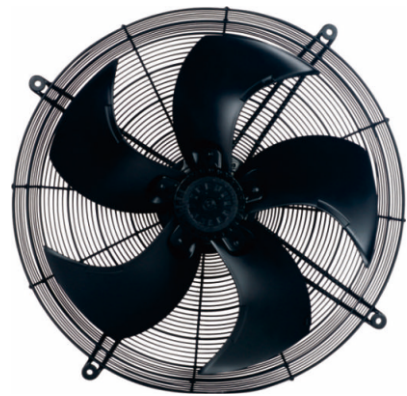

Material: Impeller made of ADC12
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用ADC12制成
电机防护等级: IP54
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

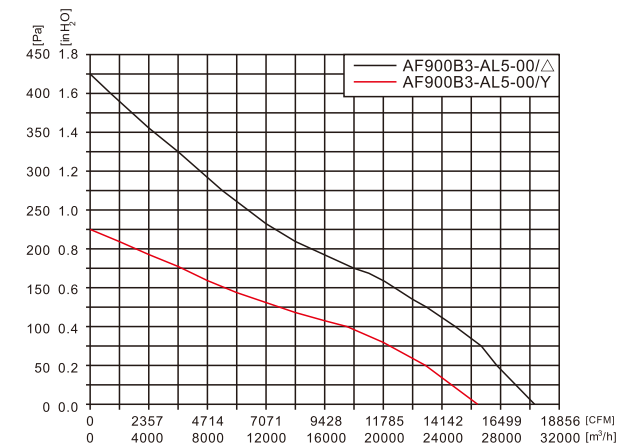

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF800B3-AL5-06	AM137B3-AL5-11	3~400	50	/	18000	10588	900	900	1.8	76

Type	Motor	Voltage (VAC)	Connection way	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AF900B3-AL5-00	AM137B3-AL5-03	3~400	Δ	30200	17775	940	2600	6.4	80	50
			Y	28500	16774	830	2050	3.4	77	

