





AC Axial Fan
交流轴流风机φ900

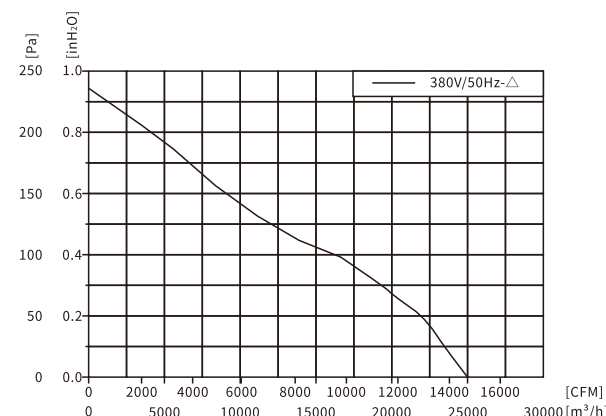


Material: Impeller made of SPCC
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AF900B4-137-000-403	AE137B4-00001-001	3~380	△	24800	14588	683	1450	3.18	74	50

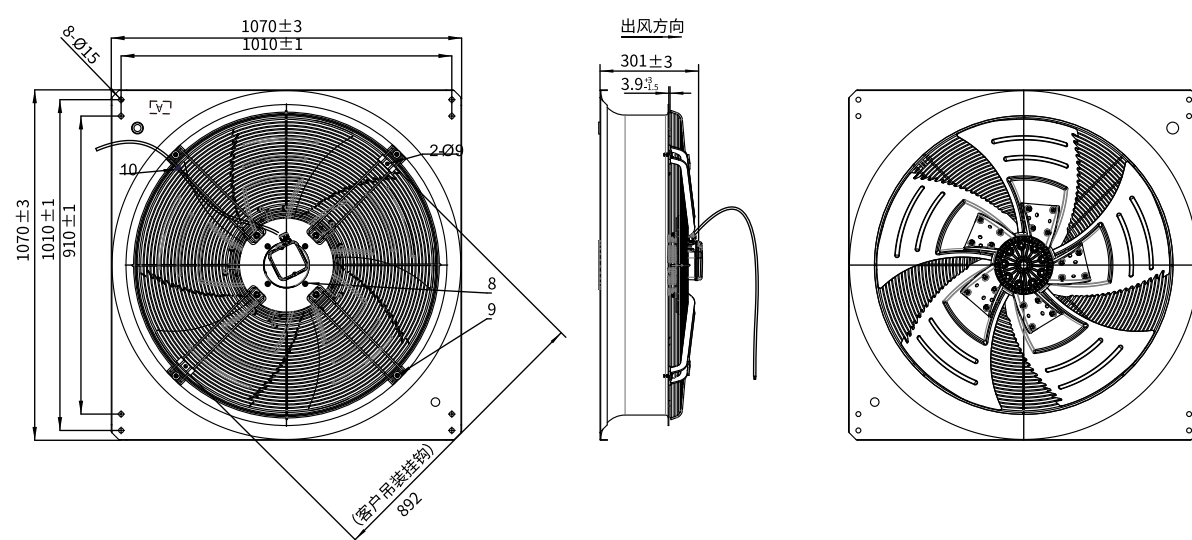

AC Centrifugal Blower Forward Curved
AC 前向式离心风机φ140

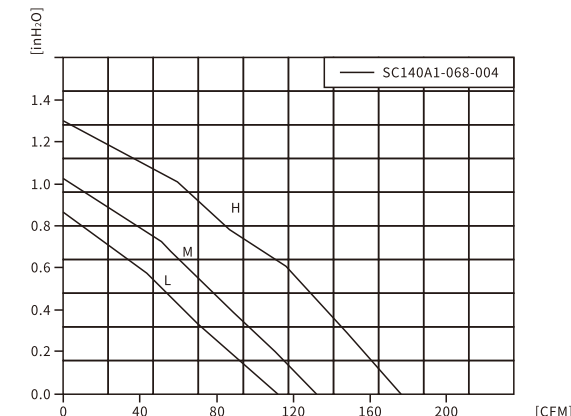

Material: Impeller made of PA6+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA6+25%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Gear	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC140A1-068-004	AE068A1-0001X	220	50	1.5/450	H	175	2080	52	0.24	55
					M	132	1700	36	0.19	50
					L	113	1470	32	0.17	45

