



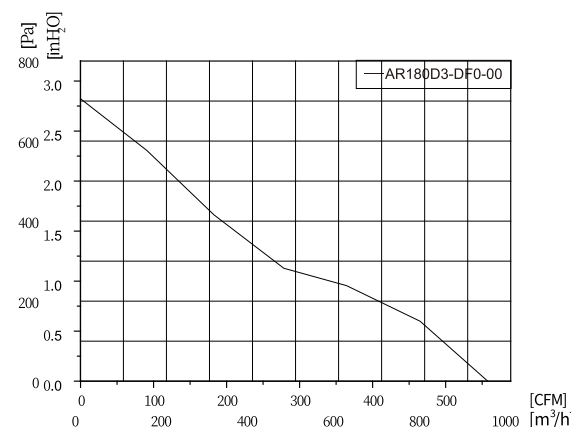

Material: The impeller made of plastic PA66
Type of protection : IP42
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads.
Approvals: CCC
Amb Temp: -25°C~60°C

材料: 风轮采用塑料PA66制成
电机防护等级: IP42
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为顺时针
产品符合的认证: CCC
工作温度范围: -25°C~60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AR180D3-DF0-00	DM055D3-DF0-12	48	/	930	547	4630	106	2.2	73

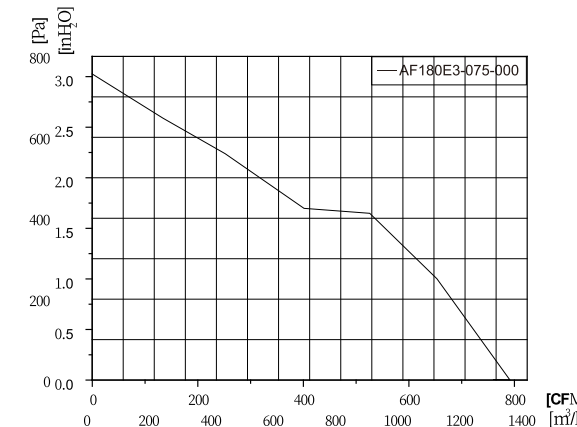

Material: The impeller made of plastic PA66
Type of protection : IP20
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: B
Direction of rotation: Clockwise, see on the leads.
Approvals: CCC, CE
Amb Temp: -25°C~60°C

材料: 风轮采用塑料PA66制成
电机防护等级: IP20
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: B级
转向: 从引出线看为顺时针
产品符合的认证: CCC, CE
工作温度范围: 25°C~60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF180E3-075-000	DE075E3-00001	48	-	1250	736	5300	158.5	3.1	73

