



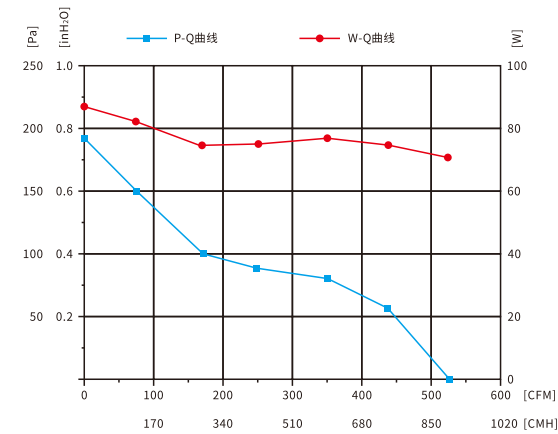

Material: Impeller made of PA66
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

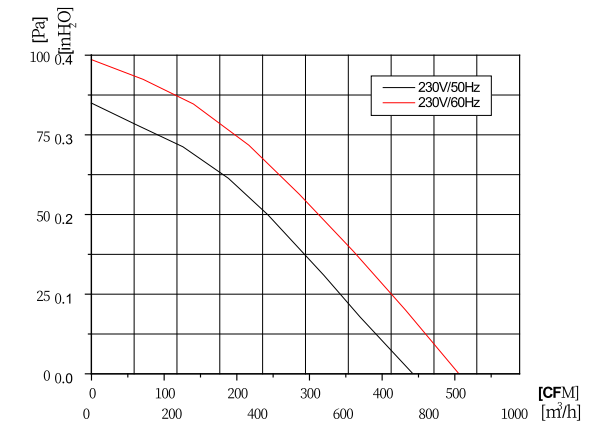

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: U anticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AR200A1-AF5-04	FW074-0354E31	220	50	2.5/450	920	1059	2670	68	0.33	≤57

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
AF290A2-AGT-02	AM068A2-AGT-03	1~230	50	749	441	1300	74	0.34	75	2/450
			60	856	504	1480	95	0.41	75	

