

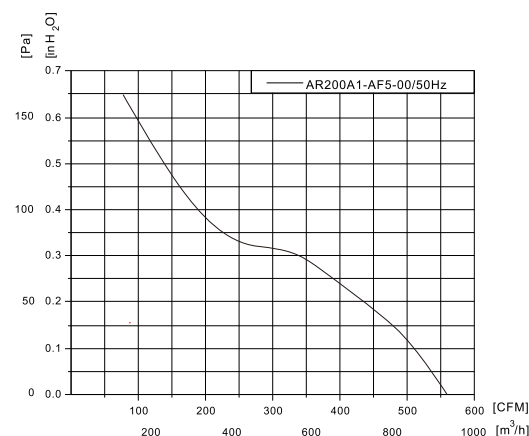


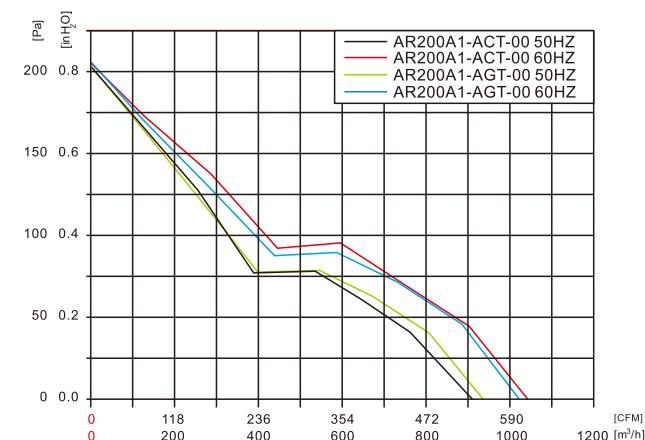

Material : Impeller made of PA66
Type of protection : IP23
Bearing : Ball bearing
Protection : Thermal overload protector (TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Clockwise, see on the leads
Approvals : CCC
Amb Temp : -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μ F / V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
AR200A1-AF5-00	AM068A1-AF5-01	220	50	3/450	880	518	2550	85	0.4	70

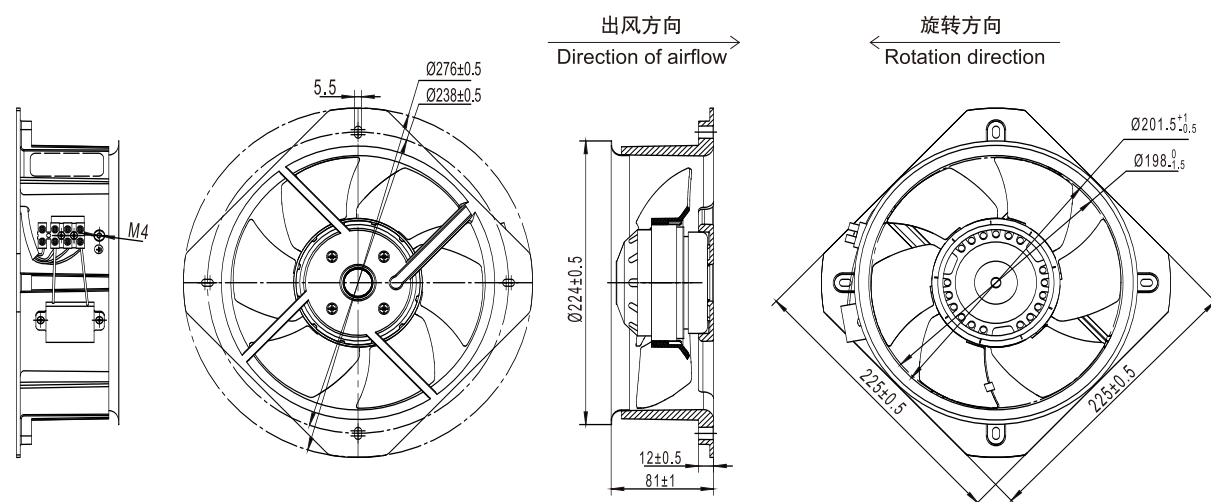

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Protection : Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise see on the leads
Approvals: UL, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:UL、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp.dB(A)
AR200A1-ACT-00	AM068A1-ACT-39	115	50/60	6/250	927/1021	540/600	2550/2820	70/85	0.7/0.8	62
AR200A1-AGT-01	AM068A1-AGT-57	230	50/60	3/450	923/1020	540/600	2570/2800	85/114	0.4/0.5	62

