



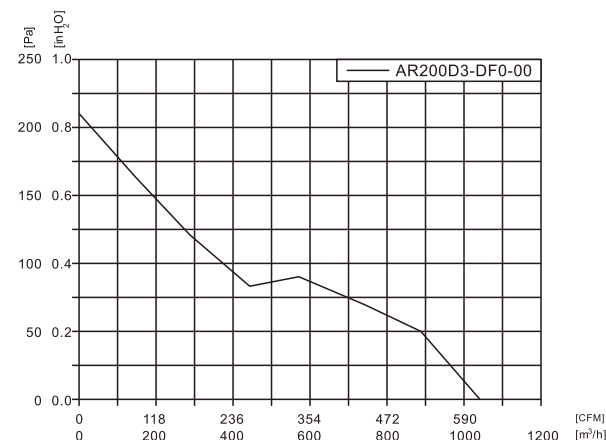

Material: The impeller made of plastic PA66
Type of protection : IP42
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads.
Approvals: CCC
Amb Temp: -25°C~60°C

材料: 风轮采用塑料PA66制成
电机防护等级: IP42
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为顺时针
产品符合的认证: CCC
工作温度范围: -25°C~60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AR200D3-DF0-00	DM075D3-DF0-00	48	-	1000	589	2900	53	1.1	64

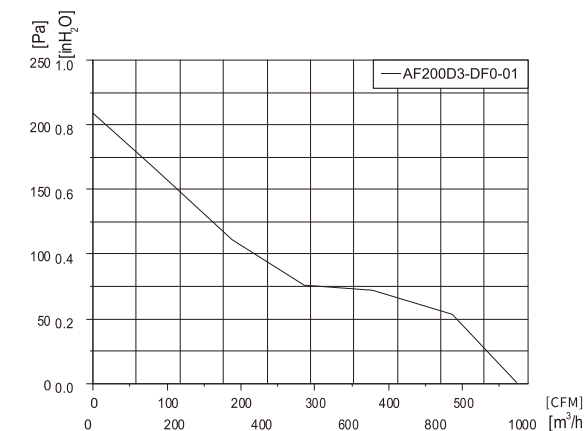

Material: The impeller made of plastic PA66
Type of protection : IP40
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals: CCC, CE
Amb.Temp: -25°C~60°C

材料: 风轮采用塑料PA66制成
电机防护等级: IP40
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为顺时针
产品符合的认证: CCC、CE
工作温度范围: -25°C~60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF200D3-DF0-01	DM075D3-DF0-38	48	/	1000	489	2800	53	1.1	64

出风方向
Direction of airflow

