



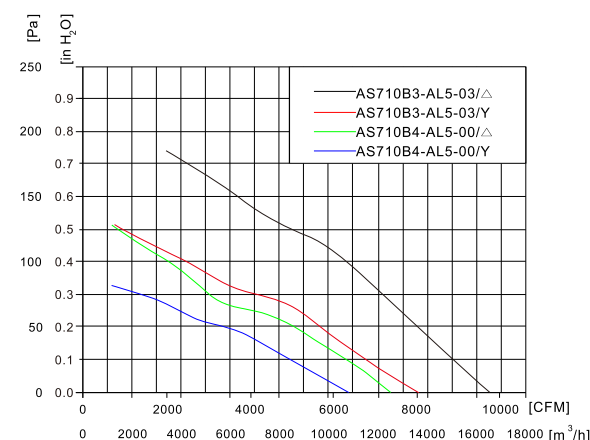

Material: Impeller made of cold rolled steel
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AS710B3-AL5-03	FW137-075SD02	3~400	Δ	17000	10006	900	1130	2.2	80	50
			Y	13000	7652	720	800	1.4	75	
AS710B4-AL5-00	FW137-075AD04	3~400	Δ	12900	7592	700	575	2.0	71	50
			Y	11300	6651	615	415	0.9	69	

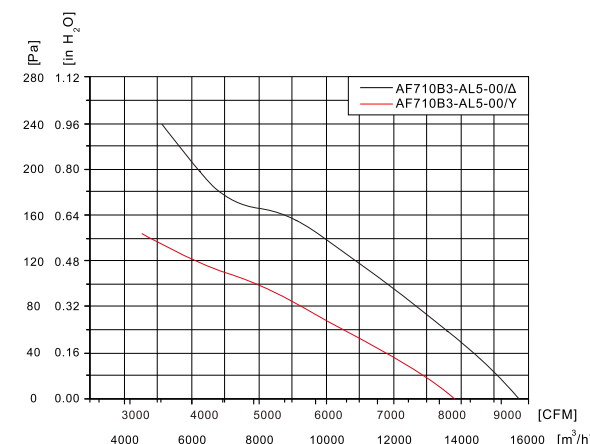

Material: Impeller made of cold rolled steel
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP54
轴承:滚珠轴承保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Connection way	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AF710B3-AL5-00	AM137B3-AL5-05	3~400	Δ	15500	9123	930	880	2.2	76	50
			Y	14000	8240	830	720	1.3	74	

