




BL SERIES

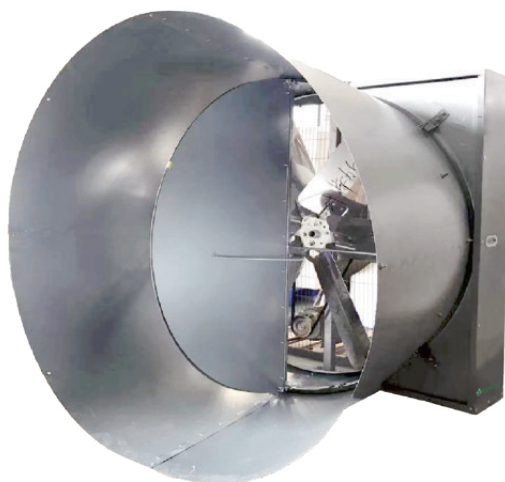

Rotation direction



Airflow direction



Model No.		BL915B2-077-00				BL1270B2-081-00				BL1370B2-081-00	
Diameter of blades (inch)		36"				50"				54"	
Motor*	Voltage (V)	380	220	230 / 460	115 / 230	380	220	230 / 460	115 / 230	380	230/460
	Hertz (Hz)	50		60		50		60		50	60
	Phase	3	1	3	1	3	1	3	1	3	3
		"36"、50" and "54"options include other voltages not mentioned above, 1 phase or 3 phase, 50Hz or 60Hz									
	Power (KW)	0.55				1.1				1.5	
Current @ 0Pa / inH2O (A)	1.7	3.7	2.8/1.4	7.0/3.5	3.0	8.0	5.0/2.5	15.3/7.6	3.9	6.4/3.2	
Performance	Pressure	Airflow			Airflow				Airflow		
	Pa / inH2O	(m ^ 3/hr.)		(cfm)	(m ^ 3/hr.)		(cfm)	(m ^ 3/hr.)		(cfm)	
	0 / 0	20483		12050	44084		25930	54000		31780	
	-25 / -0.1	17616		10360	40125		23600	47000		27660	
	-50 / -0.2	14570		8570	34561		20330	43000		25310	
	Efficiency	(cmh/ Watt)		(cfm/Watt)	(cmh/ Watt)		(cfm/Watt)	(cmh/ Watt)		(cfm/Watt)	
		26.3		15.5	26.5		15.6	26.8		15.8	
Features	Drive	Belt Drive									
	Propeller	6-Stainless steel									
	Double door	wind control									
Dimension (mm)	A01	915			1270				1370		
	A02	1000			1380				1530		
	A03	1000			1380				1530		
	A04	300			300				300		
	A05	1180			1300				1300		
	Dimension of opening (mm)	1020x1020			1400x1400				1550x1550		