
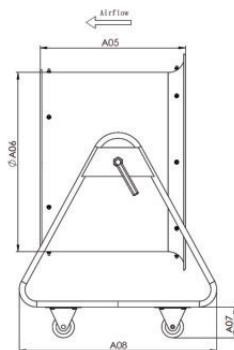


BMF SERIES



Model No.		BMF500B2-081-00				BMF600B2-081-00			
Diameter of blades (inch)		20"				24"			
Motor*	Voltage (V)	380	220	230 / 460	115 / 230	380	220	230 / 460	230
	Hertz (Hz)	50		60		50		60	
	Phase	3	1	3	1	3	1	3	1
		*20" & 24" options include other voltages not mentioned above, 1 phase or three phase, 50Hz or 60Hz							
	Power (KW)	0.55		0.75		0.75		1.5	
Current @ 0Pa / inH2O (A)	1.4	2.9	3.1 / 1.5	9.3 / 4.7	1.7	4.1	5.2 / 2.7	6.7	
Performance	Airflow	(m ^ 3/hr.)	(cfm)	(m ^ 3/hr.)	(cfm)	(m ^ 3/hr.)	(cfm)	(m ^ 3/hr.)	(cfm)
		10000	5890	12000	7070	14000	8260	17000	10000
	Efficiency	(cmh/ Watt)	(cmh/ Watt)	(cfm/Watt)	(cmh/ Watt)	(cmh/ Watt)	(cmh/ Watt)	(cfm/Watt)	(cmh/ Watt)
		16	9.5	12.6	7.4	15	8.8	12.1	7.1
	Max air supply distance (M)	40		50		50		60	
	Max noise level @ 1m (dB)	77		81		80		84	
Features	Drive	Direct Drive							
	Propeller	7-Aluminium airfoil blades							
Dimension (mm)	Size	A01	A02	A03	A04	A05	A06	A07	A08
	20"	670	670	600	496	390	515	100	400
	24"	837	770	715	596	500	613	150	520