





AC Duct Fan  
AC 球形风机φ100

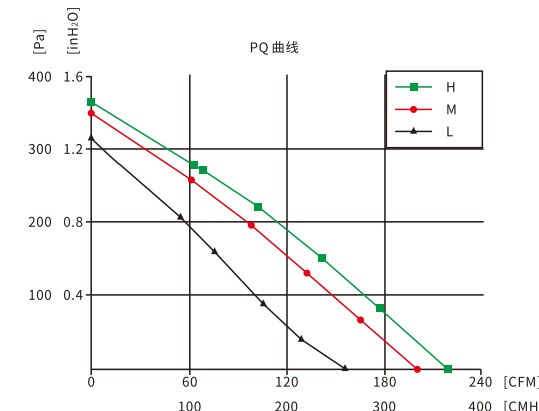

AC Duct Fan  
AC 球形风机φ125

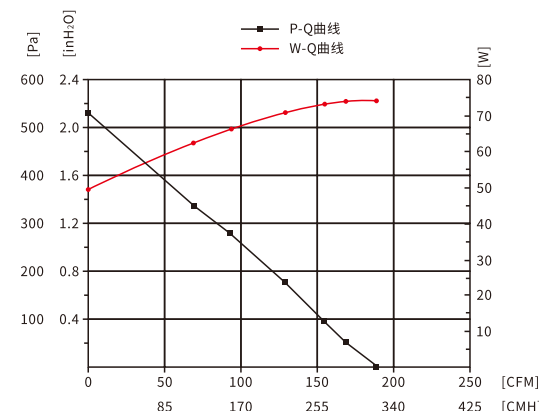

Material: Impeller made of ABS+10%GF  
Type of protection: IP23  
Bearing: Ball bearing  
Protection: Soft start, Over-current protect, Locked-rotor protect  
Motor Insulation Class: F  
Direction of rotation: Unticlockwise see on the leads  
Approvals: CE, CCC  
Amb Temp: -25°C~+50°C

材料:风轮采用ABS+10%GF制成  
电机防护等级:IP23  
轴承:滚珠轴承  
保护:软启动、过流保护、堵转保护  
绝缘等级:F级  
转向:从引出线看为逆时针  
产品符合的认证:CE、CCC  
工作温度范围:-25°C~+50°C

Material: Impeller made of plastic ABS+10%GF  
Type of protection: IP23  
Bearing: Ball bearing  
Protection: Thermal overload protector (TOP) wired internally  
Motor Insulation Class: F  
Direction of rotation: Unticlockwise, see on the leads  
Approvals: CE, CCC  
Amb Temp: -25°C~+65°C

材料:风轮采用ABS+10%GF  
制成电机防护等级:IP23  
轴承:滚珠轴承  
保护:具有可恢复性热保护功能  
绝缘等级:F级  
转向:从引出线看为逆时针  
产品符合的认证:CE、CCC  
工作温度范围:-25°C~+65°C

| Type            | Motor         | Voltage (VAC) | Frequency (Hz) | Capacitor (μF/V) | Airflow (m³/h) | Airflow (CFM) | Speed (rpm) | Power (W) | Current (A) | Noise Lp:dB(A) |
|-----------------|---------------|---------------|----------------|------------------|----------------|---------------|-------------|-----------|-------------|----------------|
| DF100A1-068-A01 | AE068A1-0001D | 120           | 60             | 5/450            | 320            | 188           | 2850        | 74        | 0.62        | 57             |

| Type            | Motor         | Voltage (VAC) | Frequency (Hz) | Capacitor (μF/V) | Airflow (m³/h) | Airflow (CFM) | Speed (rpm)     | Power (W) | Current (A) | Noise Lp:dB(A) |
|-----------------|---------------|---------------|----------------|------------------|----------------|---------------|-----------------|-----------|-------------|----------------|
| DF125A1-068-A00 | AE068A1-0001E | 230           | 50             | 1/450            | 350/320 /260   | 206/188 /153  | 2530/2250 /1850 | 53/54/54  | 0.24        | 63/64/55       |

