

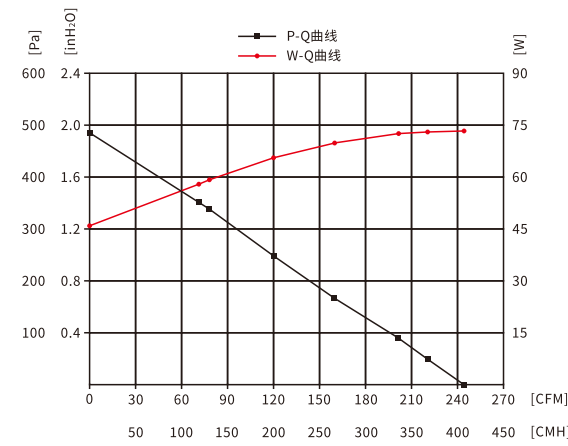


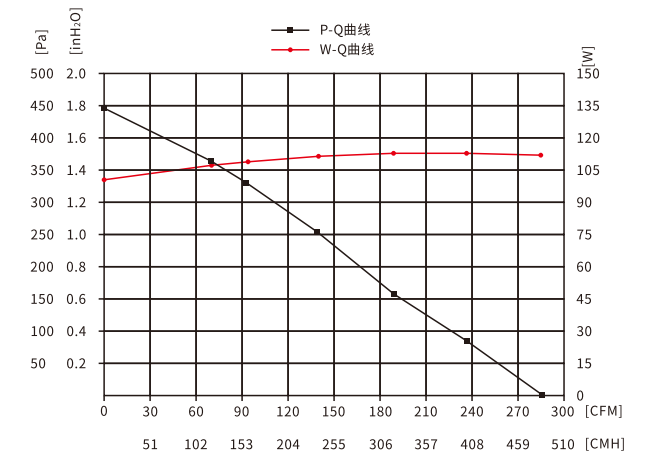

Material: Impeller made of ABS+10%GF
Type of protection: IPX4
Bearing: Ball bearing
Protection : Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unclockwise see on the leads
Approvals: CE、CCC
Amb Temp: -40℃~+65℃

材料:风轮采用ABS+10%GF制成
电机防护等级:IPX4
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40℃~+65℃

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF125A1-068-A01	AE068A1-0001D	120	60	5/450	400	235	2820	76	0.65	57

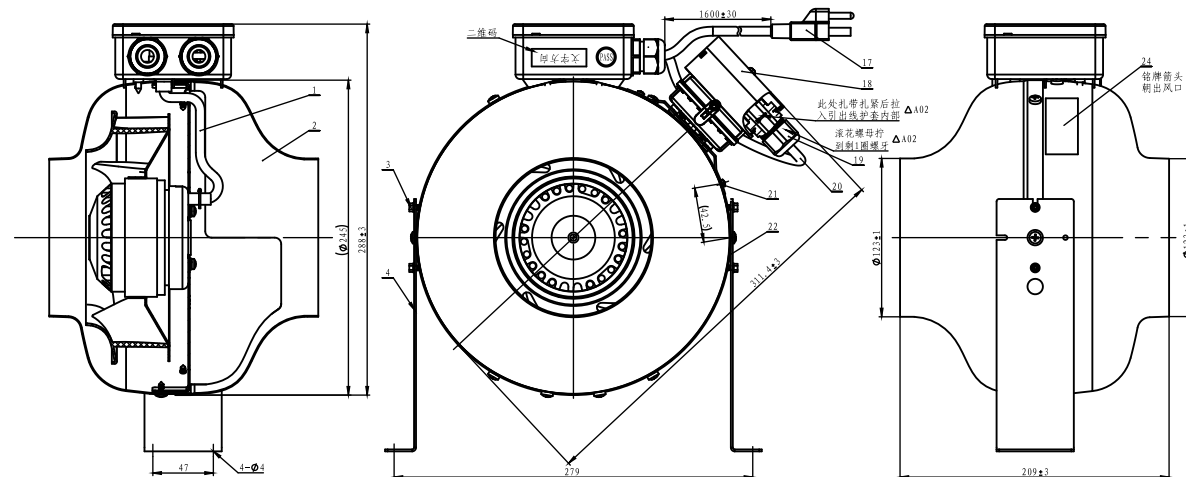

Material : Impeller made of SGCC+PA
Type of protection : IP23
Bearing : Ball bearing
Protection : Thermal overload protector (TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Unticlockwise, see on the leads
Approvals : CE, CCC
Amb Temp : -40°C~+65 °C

材料: 风轮采用SGCC+PA制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40℃~+65℃

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (µF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF150A1-AD6-00	FW068-0252E26	120	60	10/250	485	285	2911	115	0.97	72

