



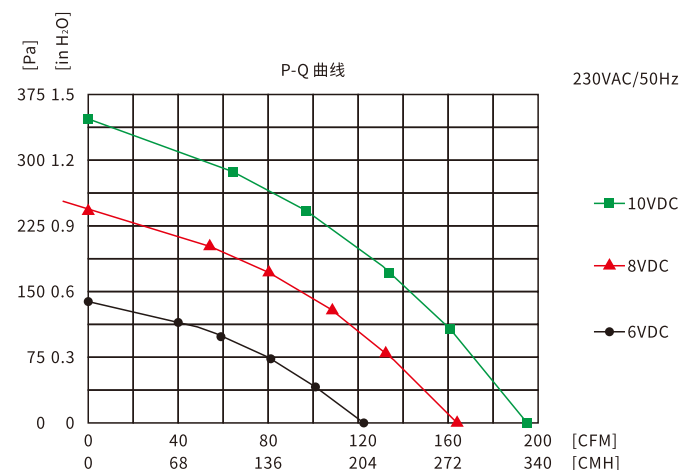

Material: Impeller made of ABS+10%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -25°C~+50°C

材料:风轮采用ABS+10%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-25°C~+50°C

Type	Motor	Frequency (Hz)	Speed regulation Voltage (VDC)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF125E2-055-A00	DE055F2-0000V	50/60	10	330	194	2800	35.5±4	0.30±0.04	64
			8	270	159	2365	22.3±3	0.20±0.03	62
			8	200	118	1785	11±2	0.11±0.02	54

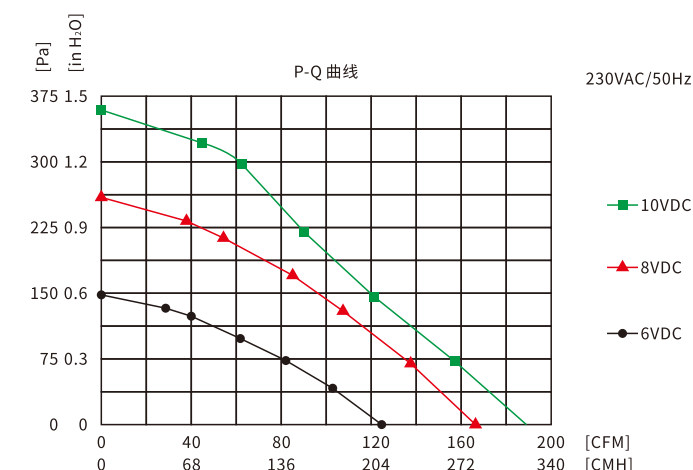

Material: Impeller made of PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Frequency (Hz)	Speed regulation Voltage (VDC)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF150E2-055-A00	DE055F2-0000U	50/60	10	460	271	2700	43±5	0.35±0.04	64
			8	415	244	2350	28.8±4	0.25±0.03	59
			6	305	179	1770	14±2	0.14±0.02	52

