



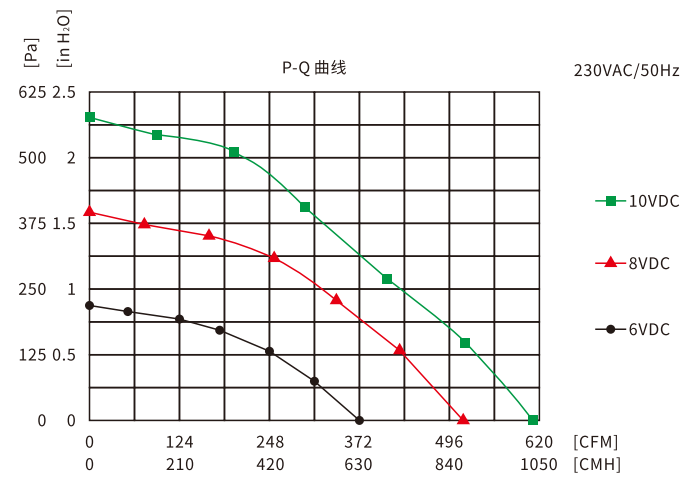

Material: Impeller made of PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Frequency (Hz)	Speed regulation Voltage (VDC)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF250F2-055-A00	DE055F2-0000S	50/60	10	1050	618	2900	122	0.97±0.12	70
			8	870	512	2440	73	0.57±0.08	66
			6	630	371	1810	34.2	0.31±0.05	59

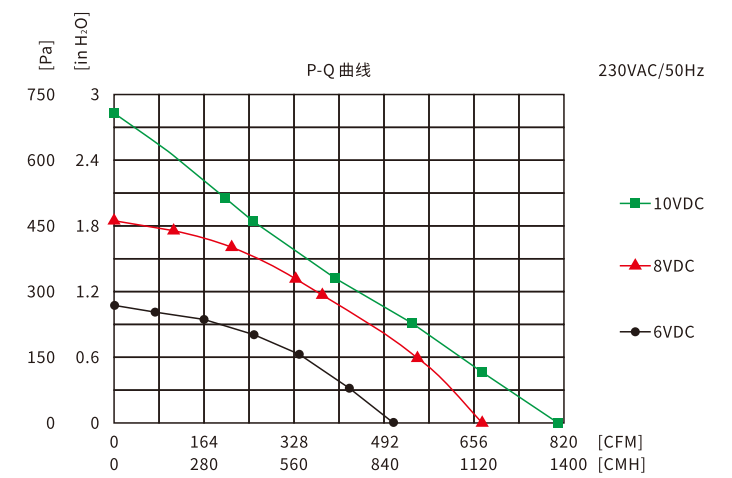

Material: Impeller made of PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: Ce, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Frequency (Hz)	Speed regulation Voltage (VDC)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF315F2-055-A00	DE055F2-0000T	50/60	10	1350	794	2800	130	1.0±0.13	73
			8	1140	671	2440	80	0.63±0.09	70
			6	850	500	1810	35.4	1.0±0.13	63

