



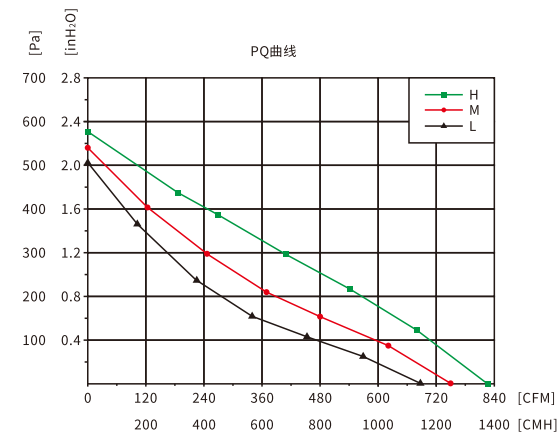

Material: Impeller made of PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用PA66+25%GF
制成电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
DF315A1-068-A00	AE068A1-0001B	230	50	/	1370/1240/1140	806/729/671	2480/2250/2050	153/140/138	0.67/0.63/0.63	68/68/54

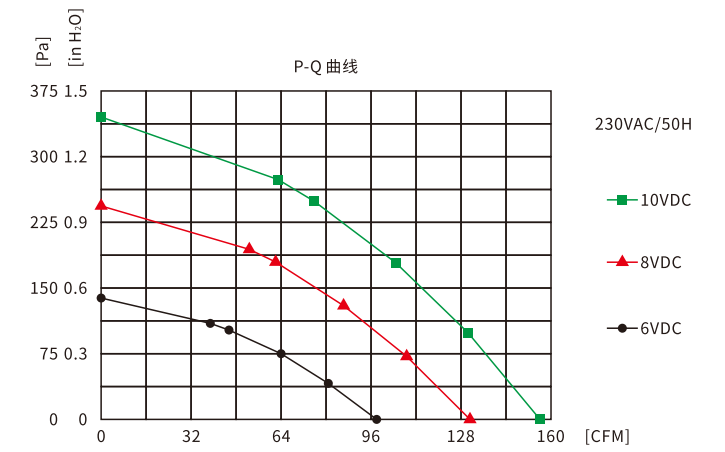

Material: Impeller made of ABS+10%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -25°C~+50°C

材料: 风轮采用ABS+10%GF制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -25°C~+50°C

Type	Motor	Frequency (Hz)	Speed regulation Voltage (VDC)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
DF100E2-055-A00	DE055F2-0000V	50/60	10	260	152	2800	38±4	0.32±0.04	64
			8	220	129	2365	23.7±3	0.321±0.03	62
			8	160	94	1785	11.7±2	0.13±0.02	54

