



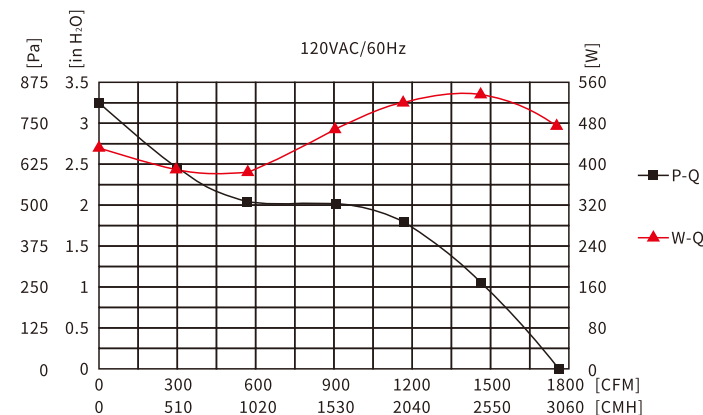


Material: Impeller made of PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unclockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF355A2-085-A00	AM085A2-AD6-00(050)	120	60	5/450	320	188	2850	74	0.62	57

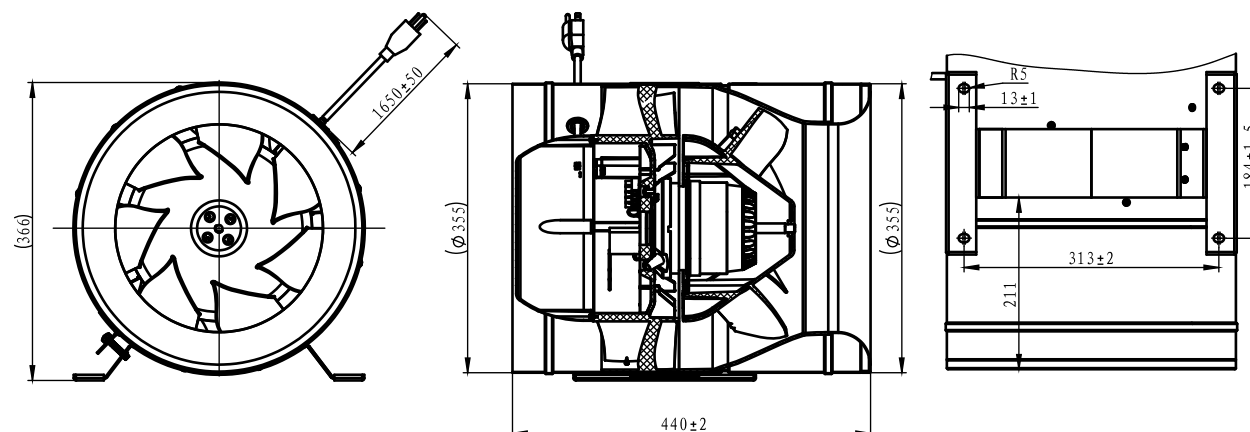

导风圈(后向离心风机) Duct ring(for Centrifugal fan)

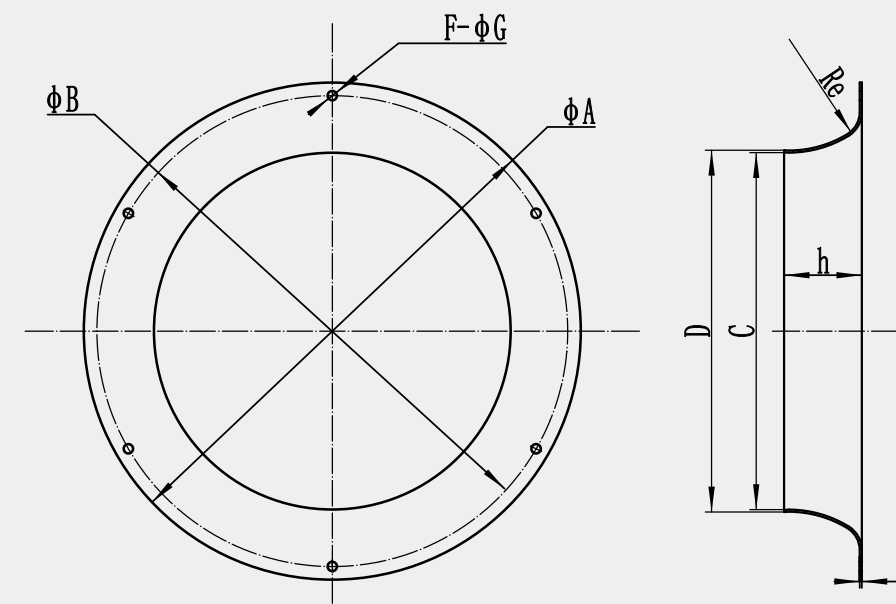

*镀锌板Galvanized Steel

Unit: mm

Size	A	B	C	D	e	F-ΦG	h	t
Φ133	129	118	85.8	87	8	4-Φ4.5	13	0.6
Φ190	170	158	123.8	125	10	4-Φ4.5	14	0.6
Φ220	252	236	155	156.2	22	3-Φ4.5	21	0.6
Φ225	223	210.7	145	148	21	4-Φ4.5	28	1.5
Φ250	255	240	164	167	18	4-Φ4.5	33	1.5
Φ280	280	260	180.5	182.5	31	4-Φ4.5	35	1
Φ320	300	280	210	212	12	4-Φ4.5	27	1
Φ355	350	325	239	241	12	6-Φ4.5	31	1
Φ400	370	345	255	257	35	4-Φ5	58	1
Φ450	450	420	311.8	314.8	85	6-Φ9	72.7	1.5
Φ500	470	445	342	346	105	6-Φ9	73.5	2
Φ560	515	490	379.6	383.6	90	6-Φ9	82	2
Φ560	565	540	407	410	50	6-Φ9	83.5	1.5
Φ630	634	600	433	437	95	6-Φ10.5	103	2

*Dimensions of fan duct ring are only for reference, for details please send your inquiry.