



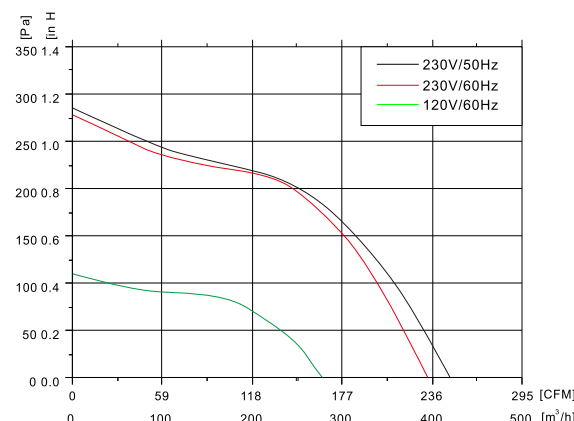

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
DH120A1-AGT-01	AM068A1-AGT-09	230	50	430	253	1620	112	0.5	62	2.5/450
			60	400	235	1520	120	0.54	62	
DH120A2-AD6-00	AM068A1-AD6-02	120	60	270	159	1170	37	0.32	51	2.5/250

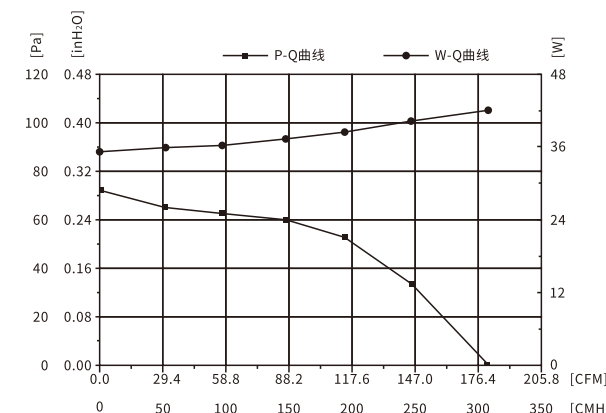

Material: Impeller made of SGCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals:CE、CCC
Amb.Temp:-40°C~+65°C

材料:叶轮由SGCC材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH120A2-AG5-01	AM068A2-AG5-17	230	50	1.5/450	310	182	1320	40	0.18	57

