

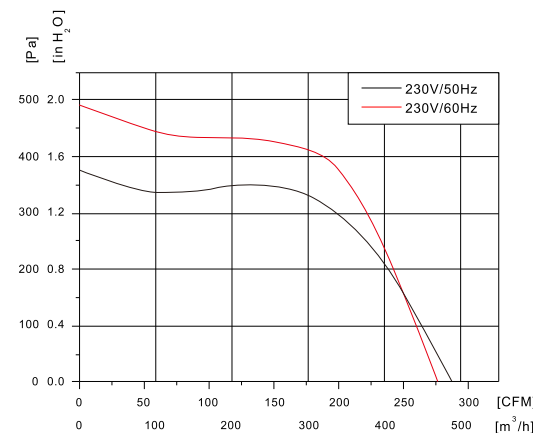


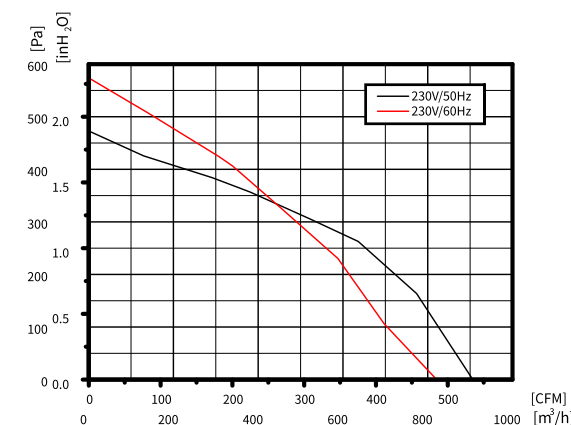

Material: Impeller made of SGCC
Type of protection : IP23
Bearing : Ball bearing
Protection : Thermal overload protector(TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Clockwise, see on the leads
Approvals : CCC, CE
Amb Temp : -40°C~+65°C

材料：叶轮由SGCC材料制成
电机防护等级:IP23
轴承：滚珠轴承
保护：具有可恢复性热保护功能
绝缘等级：F级
转向：从引出线看为顺时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH120A1-AGT-03	AM068A1-AG5-18	230	50	2.5/450	400/320 /190	235/188 /112	1550/1220 /760	112/92 /66	0.5/0.43 /0.3	64

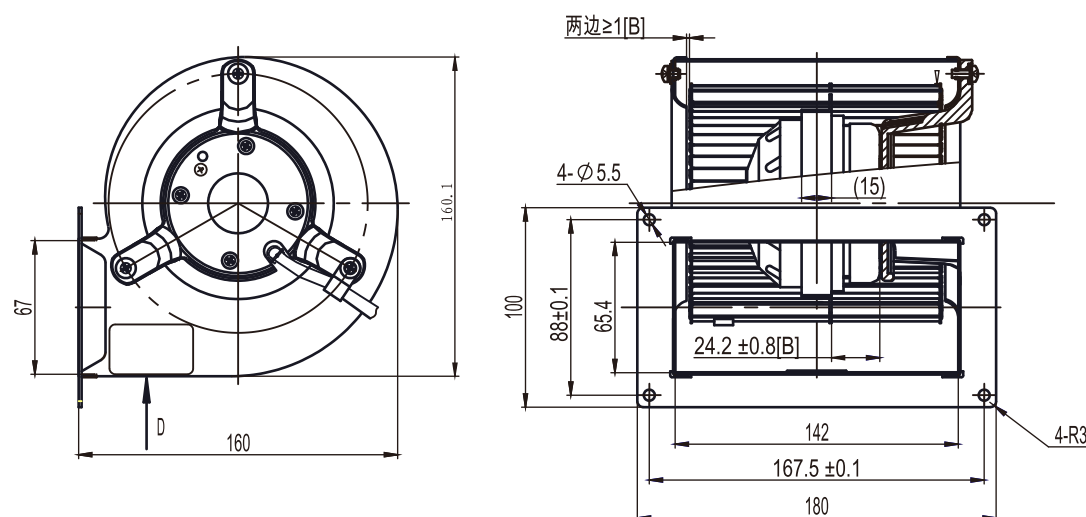

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unclockwise see on the leads
Approvals:CE, CCC
Amb.Temp:-40°C~+65°C

材料：蜗壳和风轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向：从引出线看为逆时针产品
符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
DH133A1-AGT-10	FW068-0352E41	1~230	50	960	565	1280	275	1.2	59	5/450
			60	820	482	1140	285	1.25	59	

