



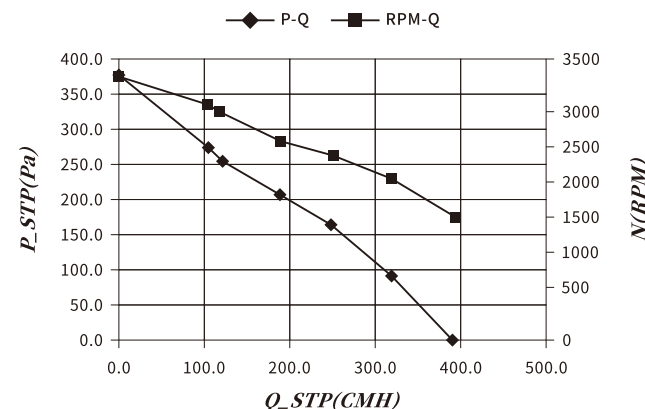

Material: Impeller made of SGCC
Type of protection: IP42
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 叶轮由SGCC材料制成
电机防护等级: IP42
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -40°C~+65°C

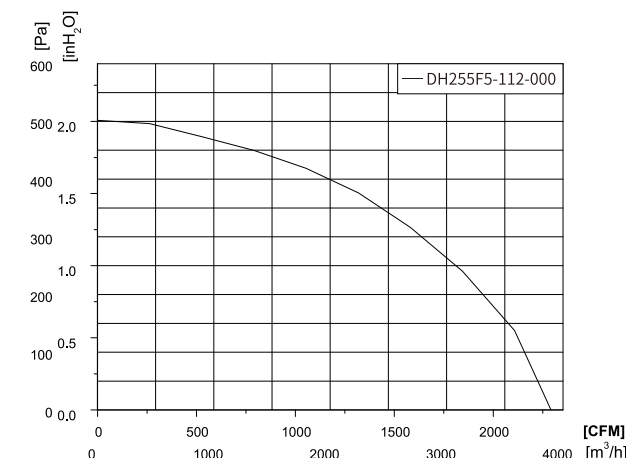

Material: Scroll housing and impeller made of SGCC
Type of protection: IP44
Technical features: Control input 0~10VDC/PWM Tach output
Bearing: Ball bearing
Operation Mode: S1
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -25°C~+60°C

材料: 蜗壳和风轮采用SGCC材料制成
电机防护等级: IP44
电气性能: 控制信号输入0~10VDC/PWM速度反馈信号
轴承: 滚珠轴承
连续工作制: (S1)
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH120E2-DC0-00	DM055E2-DC0-02	24	/	/	390	229	1520	52	2.2	61

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH255F5-112-000	DM112F5-AGT-04	1~230	50/60	3900	2355	1150	760	4.8	80

