



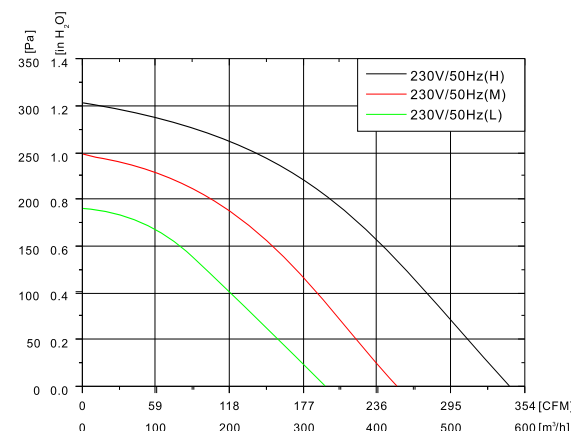

Material: Impeller made of plastic by moulding  
Type of protection : IP20  
Bearing : Sleeve bearing  
Protection : Thermal overload protector(TOP) wired internally  
Motor Insulation Class : F  
Direction of rotation : Unticlockwise, see on the leads  
Approvals : CCC, CE  
Amb Temp : -40°C~+65°C

材料:叶轮由塑料注塑而成  
电机防护等级:IP20  
轴承:滑动轴承  
保护:具有可恢复性热保护功能  
绝缘等级:F级  
转向:从引出线看为逆时针  
产品符合的认证:CE、CCC  
工作温度范围:-40°C~+65°C

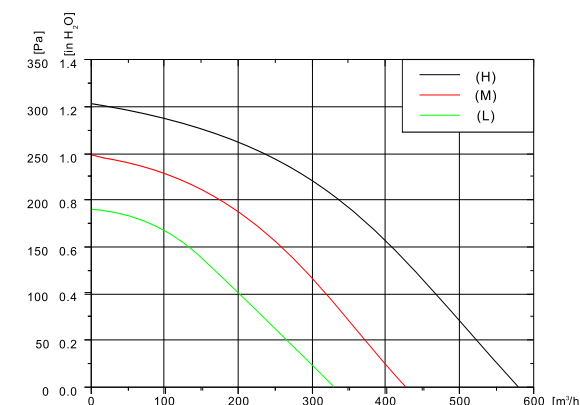

Material: Impeller made of plastic by moulding  
Type of protection: IP20  
Bearing: Sleeve bearing  
Protection: Thermal overload protector(TOP)wired internally  
Insulation Class: F  
Direction of rotation: Unticlockwise see on the leads  
Approvals:CE、CCC  
Amb.Temp:-40°C~+65°C

材料:叶轮由塑料注塑而成  
电机防护等级:IP20  
轴承:滑动轴承  
保护:具有可恢复性热保护功能  
绝缘等级:F级  
转向:从引出线看为逆时针  
产品符合的认证:CE、CCC  
工作温度范围:-40°C~+65°C

| Type           | Motor          | Voltage (VAC) | Frequency (Hz) | 3 Speeds | Airflow (m³/h) | Airflow (CFM) | Speed (rpm) | Power (W) | Current (A) | Noise Lp:dB(A) | Capacitor (μ F /V) |
|----------------|----------------|---------------|----------------|----------|----------------|---------------|-------------|-----------|-------------|----------------|--------------------|
| DH133A1-AG5-04 | AM068A1-AG5-35 | 230           | 50             | H        | 570            | 335           | 1500        | 125       | 0.53        | 61             | 4/450              |
|                |                |               |                | M        | 420            | 247           | 1170        | 93        | 0.43        | 58             |                    |
|                |                |               |                | L        | 330            | 194           | 920         | 79        | 0.38        | 55             |                    |

| Type           | Motor          | Voltage (VAC) | Frequency (Hz) | Capacitor (μF/V) | Airflow (m³/h) | Airflow (CFM) | Speed (rpm)     | Power (W) | Current (A)     | Noise Lp:dB(A) |
|----------------|----------------|---------------|----------------|------------------|----------------|---------------|-----------------|-----------|-----------------|----------------|
| DH133A1-AG5-07 | AM068A1-AG5-07 | 230           | 50             | 4/450            | 570/240 /330   | 335/247 /194  | 1600/1280 /1040 | 28/31     | 0.53/0.46 /0.42 | ≤62            |

