



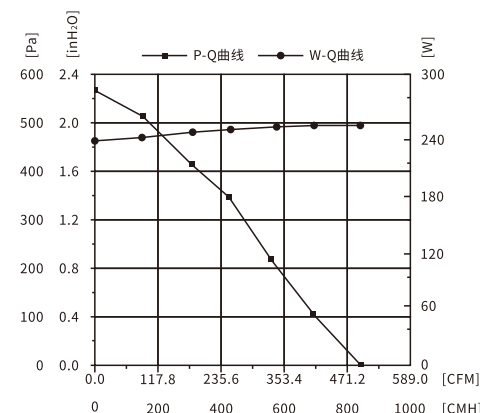

Material: Impeller made of SGCC
Type of protection : IP23
Bearing : Ball bearing
Protection : Thermal overload protector(TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Unticlockwise, see on the leads
Approvals : CCC, CE
Amb Temp : -40°C~+65°C

材料:叶轮由SGCC材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH133A1-AC6-01	FW068-0352E93	115	60	25/450	832	489	1100	238	2.1	59

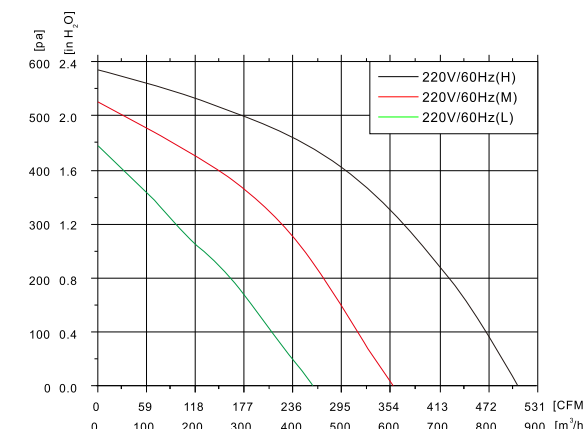

Material: Scroll housing made of plastic PP(V1)
impeller made of galvanized sheet steel
Type of protection: IP20
Bearing: Sleeve bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Clockwise see on the leads
Approvals:CE、CCC
Amb.Temp:-40°C~+65°C

材料:风轮采用镀锌板制成,蜗壳采用工程塑料PP(V1阻燃)
电机防护等级:IP20
轴承:滑动轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	3 Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
DH146A1-AF6-05	AM068A1-AF6-03	220	60	H	850	500	1770	288	1.36	72	10/450
				M	600	353	1260	213	1.09	63	
				L	430	253	915	180	0.96	55	

