

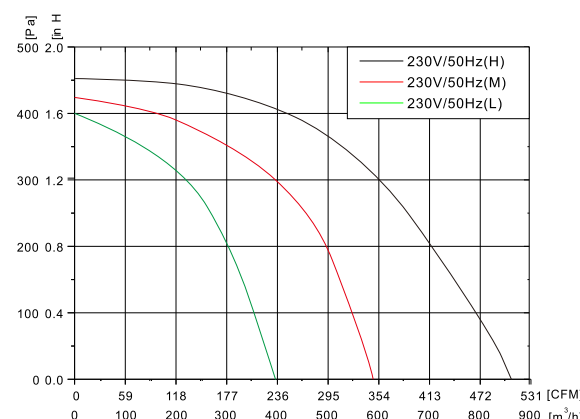


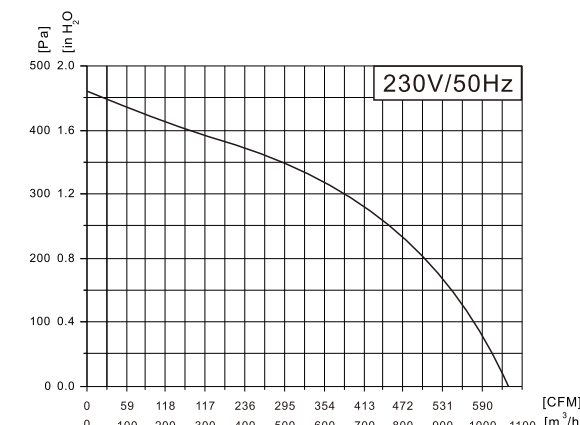

Material: Scroll housing made of plastic PP(V1),
impeller made of galvanized sheet steel
Type of protection: IP20
Bearing: Sleeve bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Clockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料：风轮采用镀锌板制成，蜗壳采用工程塑料PP (V1阻燃)
电机防护等级:IP20
轴承：滑动轴承
连续工作制:(S1)
保护：具有可恢复性热保护功能
绝缘等级:F级
转向：从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	3 Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
DH146A1-AG5-01	AM068A1-AG5-21	230	50	H	850	500	1984	298	1.3	73	10/450
				M	600	535	1422	207	0.94	62	
				L	400	235	1000	178	0.82	55	

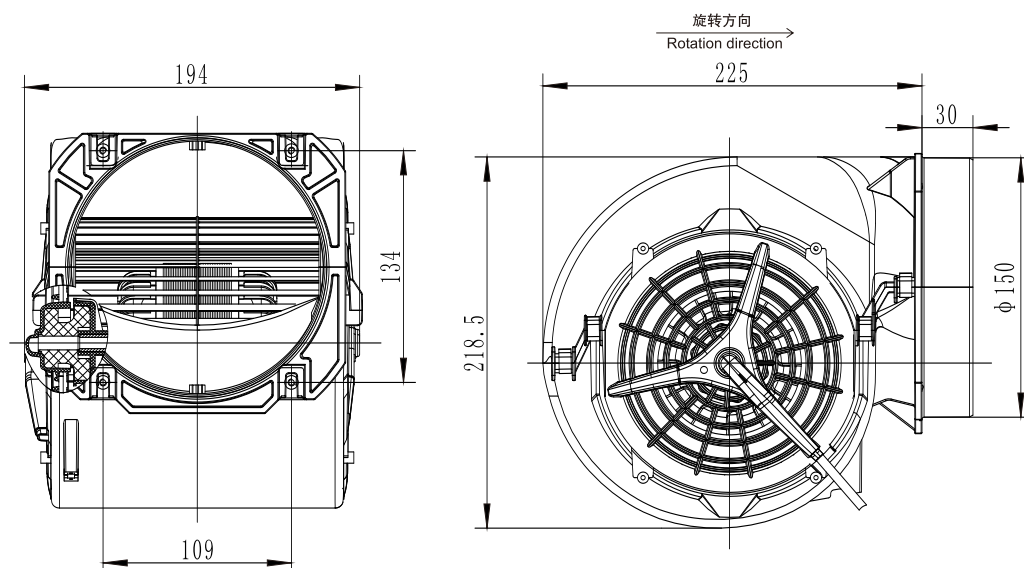

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Clockwise see on the leads
Approvals: CCC
Amb.Temp: -40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
DH146A1-AG5-30	AM068A1-AG5-68	230	50	1050	618	1350	295	1.27	69	8/450

