



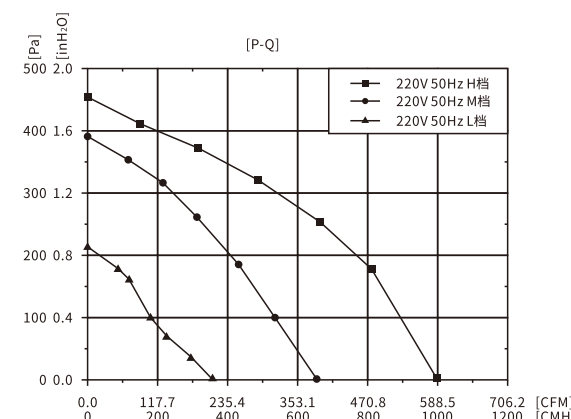

Material: Impeller made of SGCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:叶轮由SGCC材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围:-40°C~+65°C

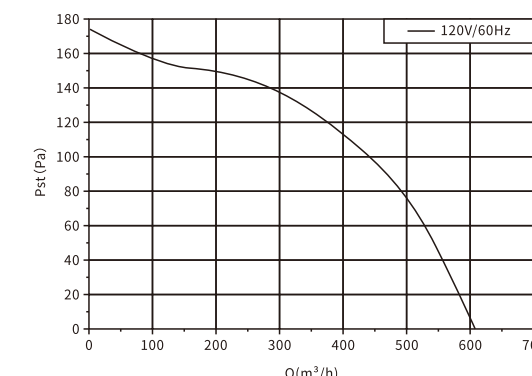

Material: Impeller made of ABS+20%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -25°C~+50°C

材料:叶轮由ABS+20%GF塑料材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围:-25°C~+50°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH146A1-AF5-06	AM068A1-AF5-13	220	50	8/450	1000/660 /360	588/388 /212	1230/830 /460	240/160 /122	1.1/0.81 /0.62	65/54 /37

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH151A2-AD6-03	AM068A1-AD6-03	120	60	8/250	600	353	930	95	0.8	56

