

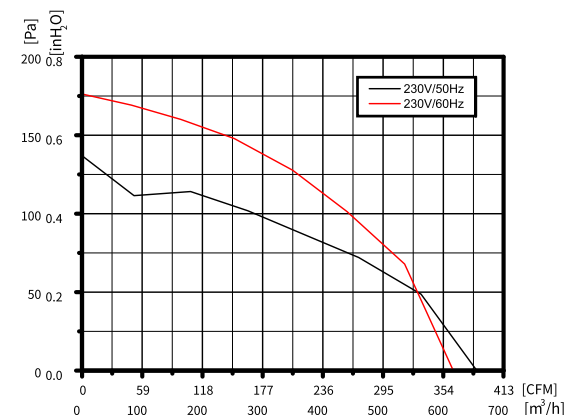


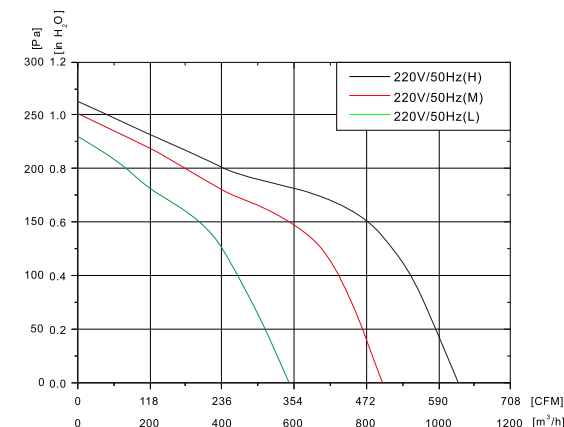

Material: Impeller completely made of plastic
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CCC
Amb Temp: -25°C~+50°C

材料:蜗壳和风轮采用塑料制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制: (S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-25°C~+50°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (µF/V)
DH151A2-AGT-00	FW068-0204E04	1~220	50	615	362	900	95	0.42	40	2/450
			60	570	335	800	101	0.45		

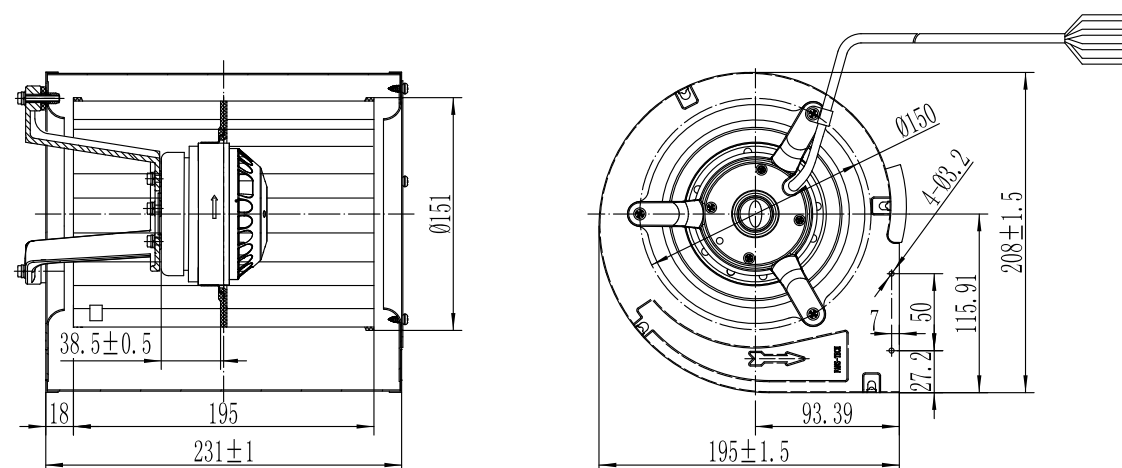

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制: (S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	3 Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (µF/V)
DH200A2-AF5-00	AM068A2-AF5-00	220	50	H	1000	816	800	215	1	65	6/450
				M	800	654	630	178	0.82	58	
				L	580	474	450	142	0.68	52	

