



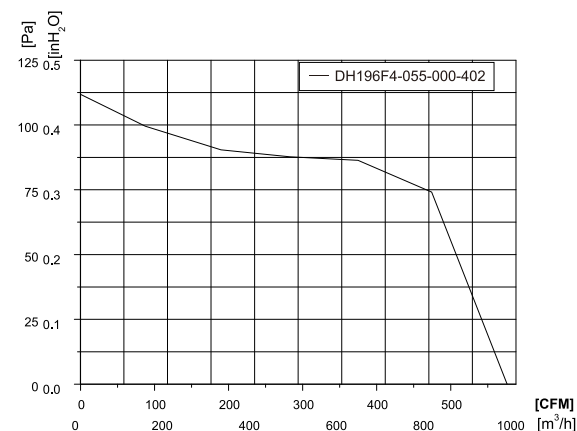

Material: Impeller made of PP
Type of protection: IP42
Bearing: Ball bearing
Technical features: Control input 0~6.5VDC/PWM Tach output
Motor protection: Locked-rotor protection, Current limited Under-voltage and over-voltage lockout protection Soft start
Protection: Thermal overload protector(TOP)wired internallyMotor
Motor Insulation Class: B
Direction of rotation: U anticlockwise, see on the leads
Approvals: CCC
Amb.Temp: -25°C~+60°C

材料: 风轮采用塑料PP制成
电机防护等级: IP42
轴承: 滚珠轴承
电气性能: 控制型号输入0~6.5VDC/PWM 速度反馈信号
保护: 堵转保护、限流保护、低电压和过电压停止运转保护、软启动
绝缘等级: B级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -25°C~+60°C

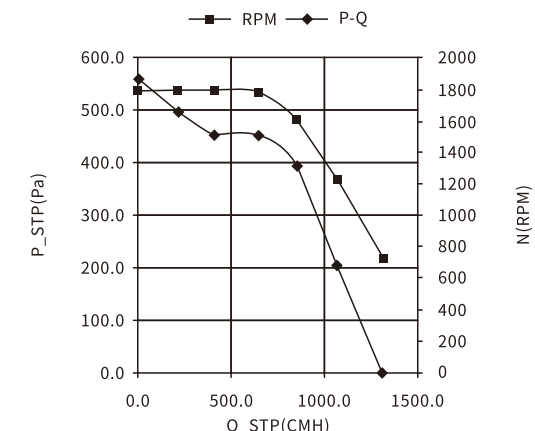

Material: Impeller made of SPCC
Type of protection: IP44
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料: 叶轮由SPCC材料制成
电机防护等级: IP44
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH196F4-055-000-402	DM055F4-00000	220	/	970	571	700	71	0.23	54.5

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH220E5-075-000	DM075E5-AGT-12	230	50/60	/	1390	818	770	130	0.9	62

