



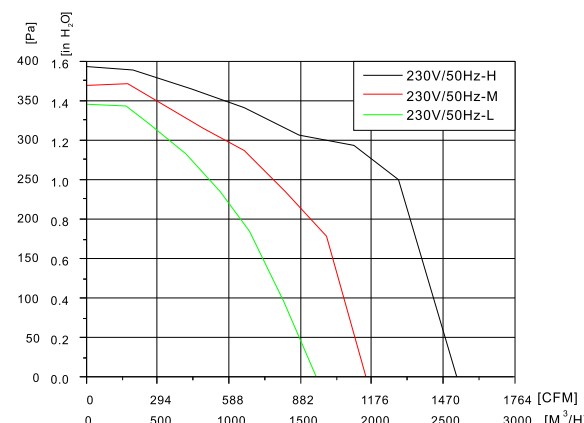

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP20
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals:CCC
Amb.Temp:-40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP20
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	3 Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH230A2-AG5-01	AM106A2-AG5-01	230	50	H	2630	1548	780	734	3.2	71
				M	1950	1148	600	465	2.1	65
				L	1620	954	500	330	1.5	60

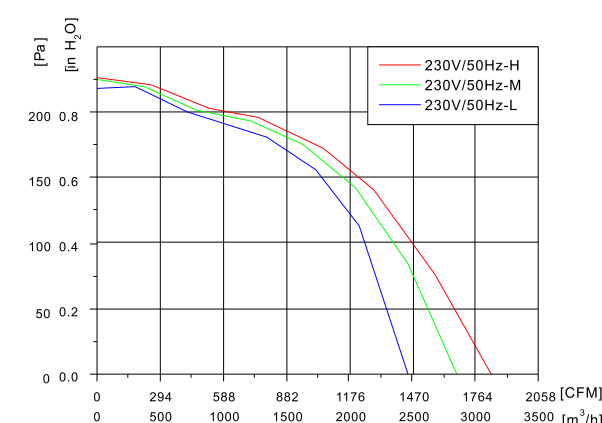

Material : Scroll housing and impeller made of galvanized sheet steel
Type of protection : IP10
Bearing : Ball bearing
Operation Mode: (S1)
Protection : Thermal Overload Protector(TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Unticlockwise see on the leads
Approvals : CCC、CE
Amb Temp : -40°C~+65°C

材料:蜗壳和风轮采用镀锌板制成
电机防护等级:IP10
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	3 Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH255A3-AG5-00	AM106A3-AGT-02	230	50	H	3100	1884	860	486	2.2	73
				M	2850	1700	795	412	1.8	71
				L	2500	1450	695	335	1.6	67

