

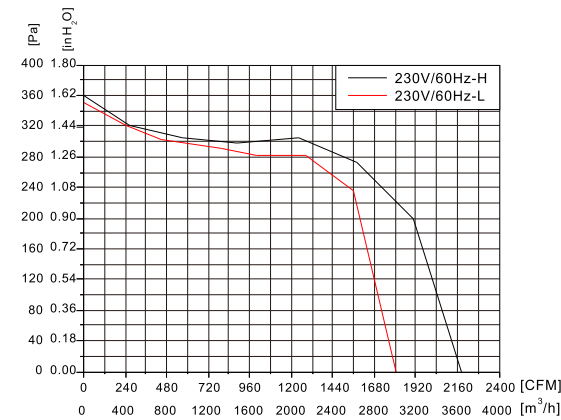


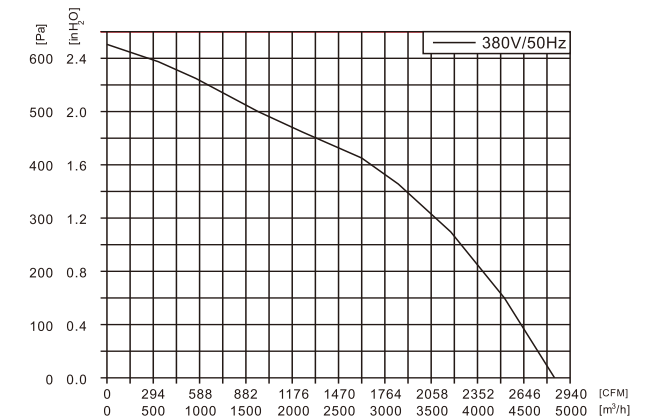

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP20
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP) wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料: 蜗壳和风轮采用镀锌板制成
电机防护等级: IP20
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	2 Speeds	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH280A3-AGT-01	AM106A3-AGT-03	230	60	H	3800	2240	790	795	3.6	74
				L	3100	1820	650	620	2.9	70

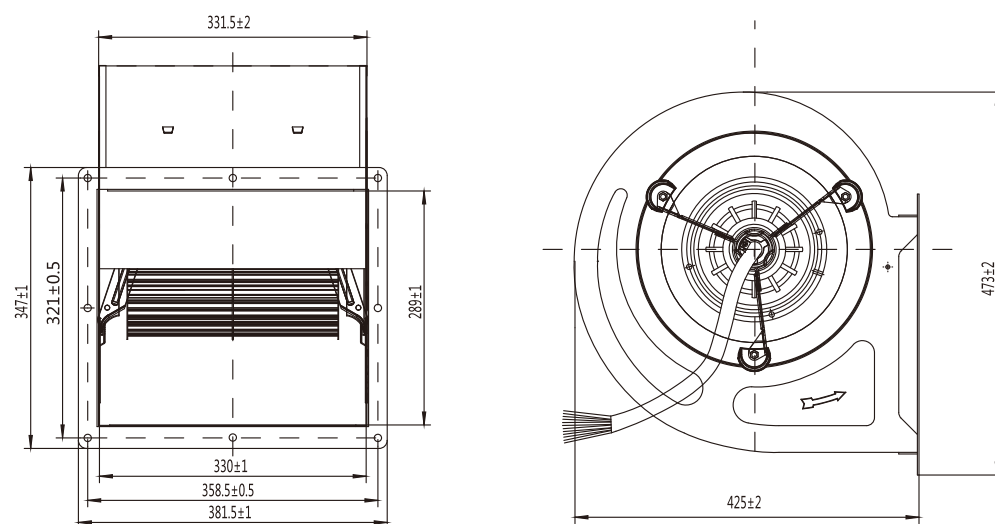

Material: Scroll housing and impeller made of galvanized sheet steel
Type of protection: IP20
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料: 蜗壳和风轮采用镀锌板制成
电机防护等级: IP20
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC, CE
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DH280B2-AK5-00	AM106B2-AK5-00	380	50	4600	2570	920	1590	3.0	80

