





AC Centrifugal Blower Forward Curved Single Inlet
交流单进风前向式离心风机φ120

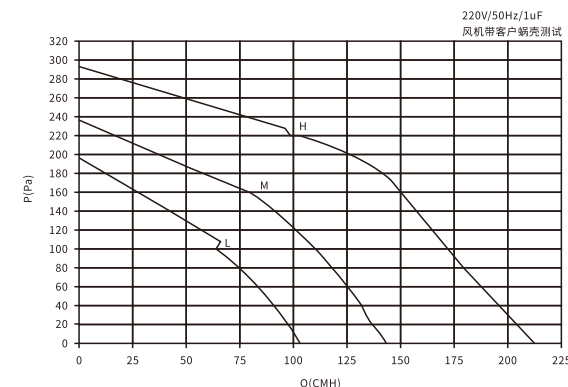


Material : Scroll housing and impeller made of galvanized sheet steel
Type of protection : IP23
Bearing : Ball bearing
Motor Insulation Class : F
Direction of rotation : Unticlockwise, see on the leads
Approvals : CCC、CE
Amb Temp : -40°C~+65°C

材料:蜗壳和风轮采用冷轧板制成
电机防护等级:IP23
轴承:滚珠轴承
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC120A1-068-000	AE068A1-00015-001	220	50	1/450	211/143/103	124/84/61	1610/1100/790	37/32/28	0.165/0.145/0.13	65

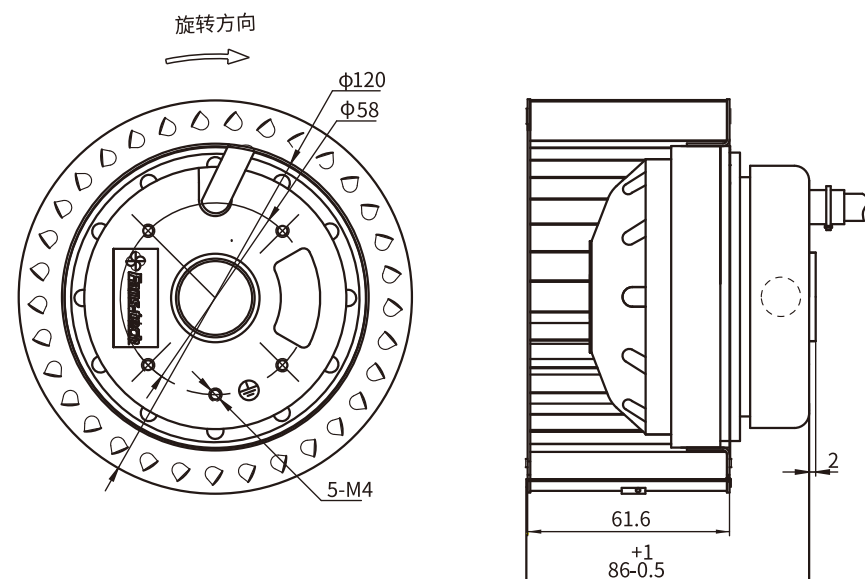

AC Centrifugal Blower Backward Curved
交流后向式离心风机φ133

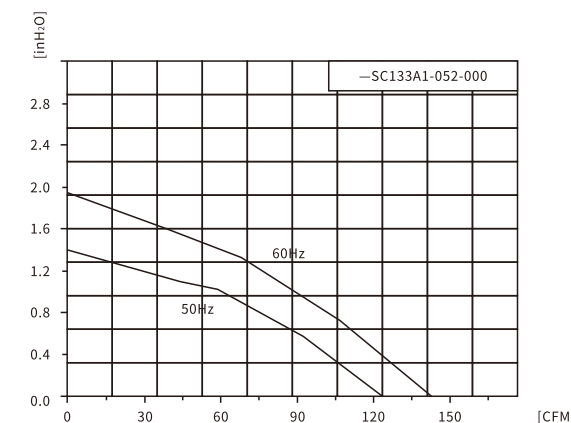

Material: Impeller made of plastic PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation : Unticlockwise, see on the leads
Approvals:CCC、CE
Amb.Temp:-40°C~+65°C

材料：叶轮由PA6+25%GF塑料材料制成
电机防护等级:IP23
轴承：滚珠轴承连续工作制:(S1)
保护：具有可恢复性热保护功能
绝缘等级:F级
转向：从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC133A1-052-000	AE052A1-00003-001	230	50/60	1/450	215/240	126/141	2700/3100	28/31	0.13/0.14	58/61

