



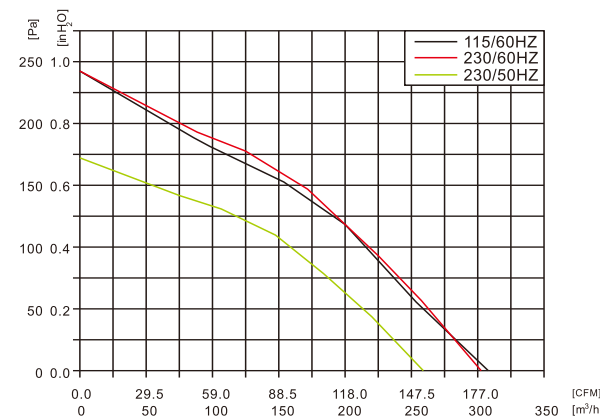

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals:UL
Amb.Temp:-40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:UL
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
SC133A1-AC6-00	AM052A1-AC6-00	115	60	300	177	3000	25	0.25	60	2.5/250
SC133A1-AGT-00	AM052A1-AGT-00	230	50/60	260/310	154/183	2700/3100	29/31	0.13/0.14	57/61	1/450

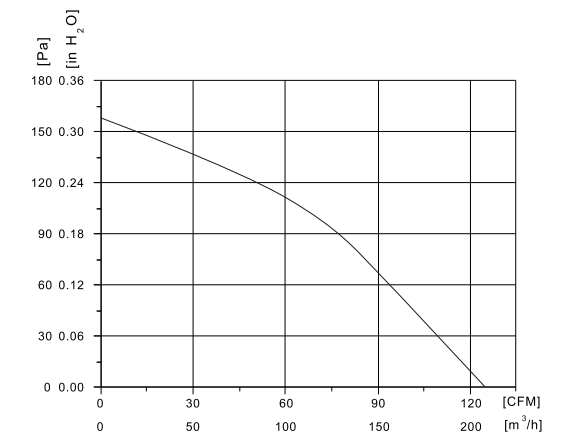

Material: Impeller made of SGCC
Type of protection : IP20
Bearing : Ball bearing
Protection : Thermal overload protector(TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Clockwise, see on the leads
Approvals : CCC、CE
Amb Temp : -40°C~+65°C

材料：叶轮由SGCC材料制成
电机防护等级:IP20
轴承：滚珠轴承
保护：具有可恢复性热保护功能
绝缘等级：F级
转向：从引出线看为顺时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
SC133C1-AG5-02	FW052-020B04	220	50	200	120	2550	33	0.2	55	/

