

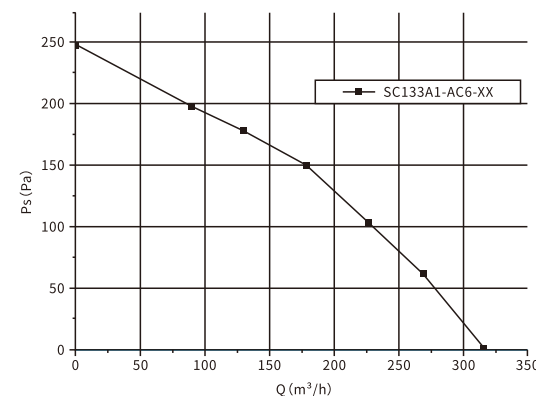


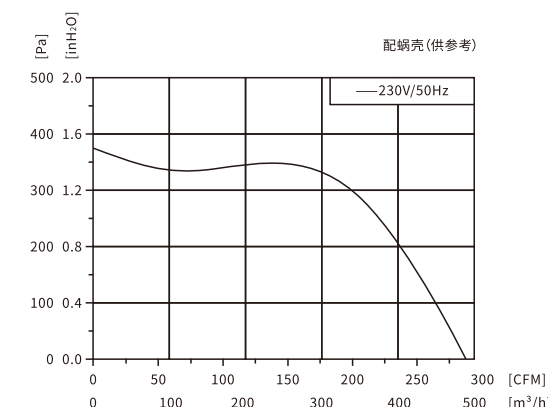

Material: Impeller made of plastic PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料:叶轮由PA66+25%GF塑料材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC133A1-AC6-03	AM052A1-AC6-05	115	60	2.5/450	320	188	3150	23	0.21	60

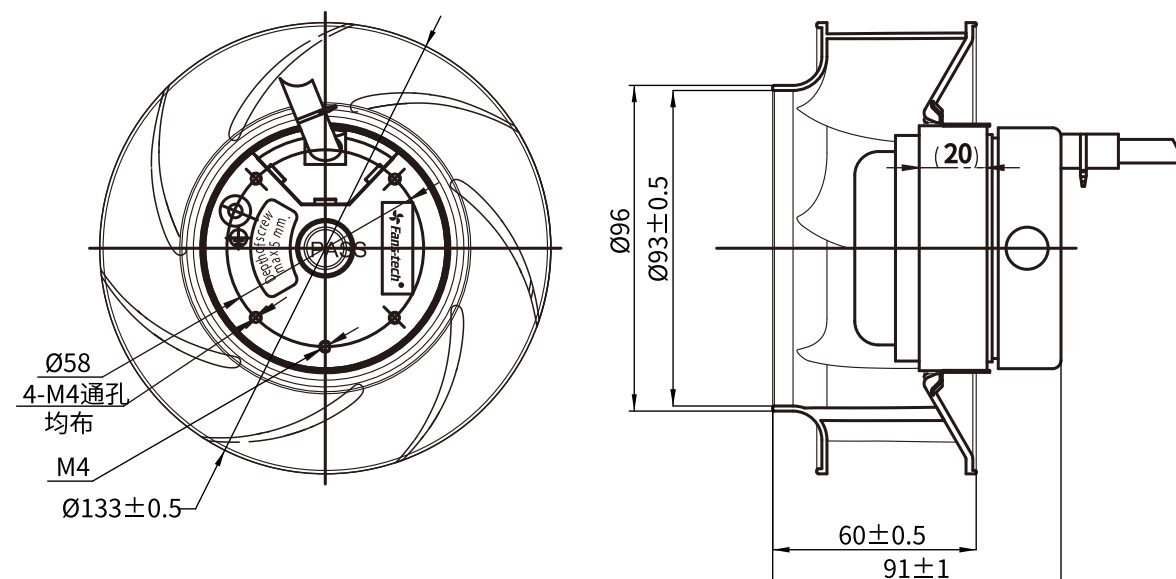

Material: Impeller made of PA+SGCC, Black
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals:CCC
Amb.Temp:-40°C~+65°C

材料:风轮采用PA+SGCC, 黑色
电机防护等级:IP23
轴承:滚珠轴承连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC140A1-AG5-22	AM068A1-AGT-95	1~230	50	(480)	(283)	2360	75	0.34	65	2/450

