

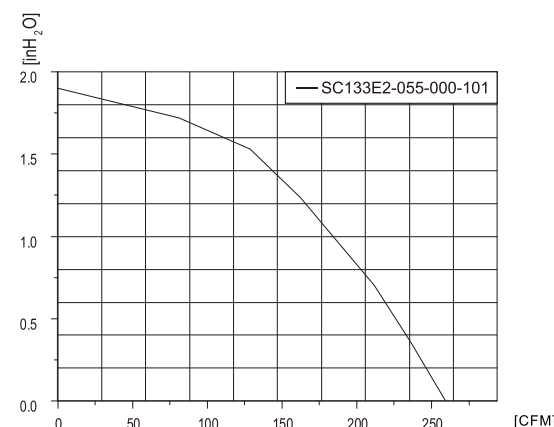


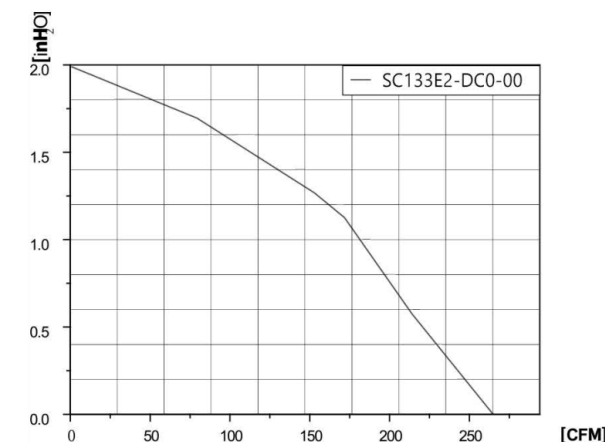

Material: Impeller made of plastic PA66
Type of protection: IP42
Technical features: Control input 0-10VDC / PWM, Tach output
Bearing: Ball bearing
Protection: Locked-rotor protection, Current limited,
Under-voltage and over-voltage lockout protection, Soft start
Insulation Class: F
Direction of rotation: Anticlockwise, see on the leads
Approvals: CE, CCC
Amb. Temp: -25°C ~ +60°C

材料: 叶轮采用PA66塑料制成
电机防护等级: IP42
轴承: 滚珠轴承
电气性能: 控制型号输入0-10VDC/PWM, 速度反馈信号
保护: 堵转保护、限流保护低电压和过电压停止运转保护软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -25°C ~ +60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC133E2-055-000-101	DM055E2-00001	230	50/60	435	256	4480	42	0.35	63

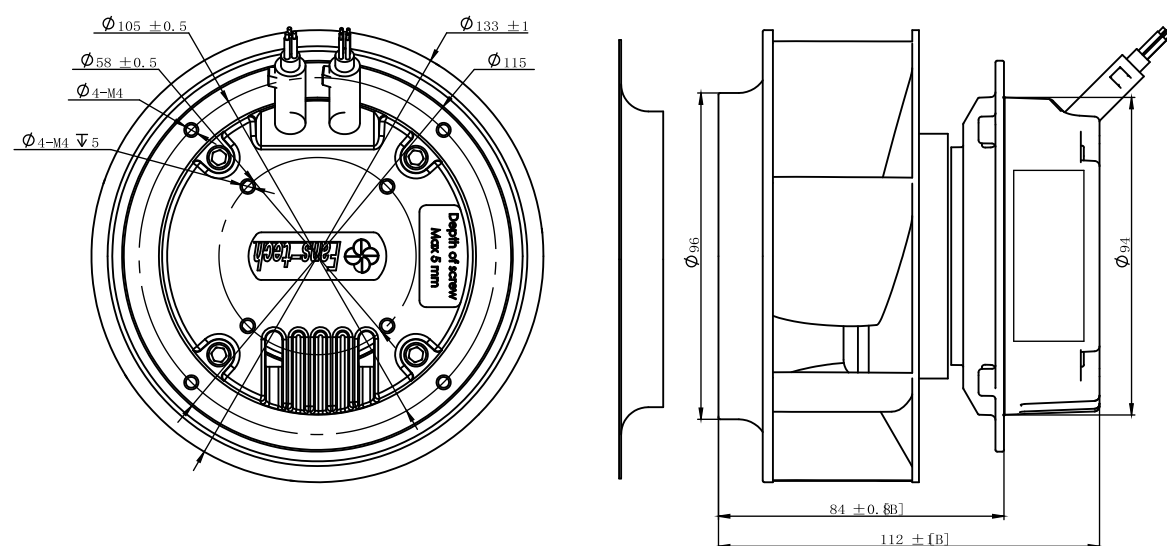

Material: Impeller made of PA66+25%GF
Type of protection: IP44
Bearing: Ball bearing
Technical features: Control input 0-10VDC / PWM, Tach output
Operation Mode: S1
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anticlockwise, see on the leads
Approvals: CCC
Amb Temp: -20°C ~ +50°C

材料: 叶轮由PA66+25%GF材料制成
电机防护等级: IP44
轴承: 滚珠轴承
电气性能: 控制型号输入0-10VDC/PWM, 速度反馈信号
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -20°C ~ +50°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC133E2-DC0-00	DM055E2-DC0-01	24	/	/	445	262	4630	45.5	1.9	65

