





AC Centrifugal Blower Forward Curved
AC 前向式离心风机φ140

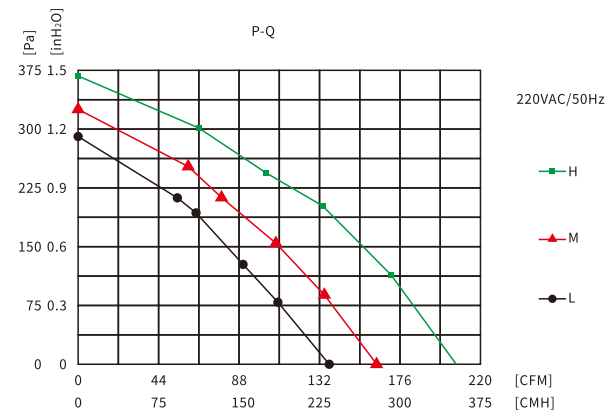


Material: Impeller made of PA6+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用PA66+25%GF制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Gear	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC140A1-068-005	AE068A1-0001Y	220	50	2.0//450	H	210	2380	57	0.26	57
					M	160	2050	49	0.23	56
					L	135	1830	46	0.22	53

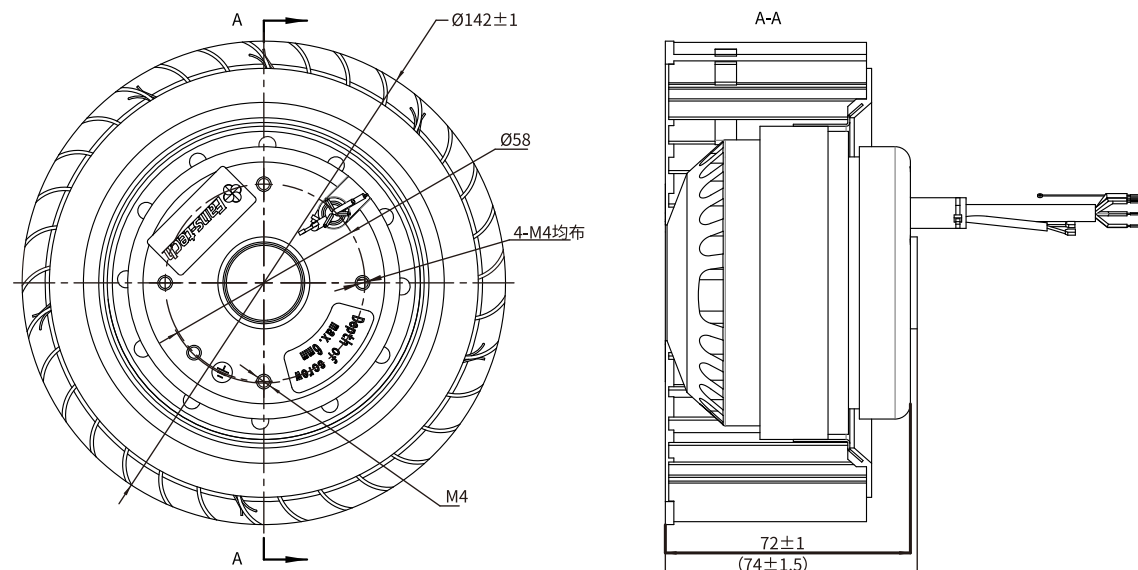

AC Centrifugal Blower Backward Curved
AC后向式离心风机φ160

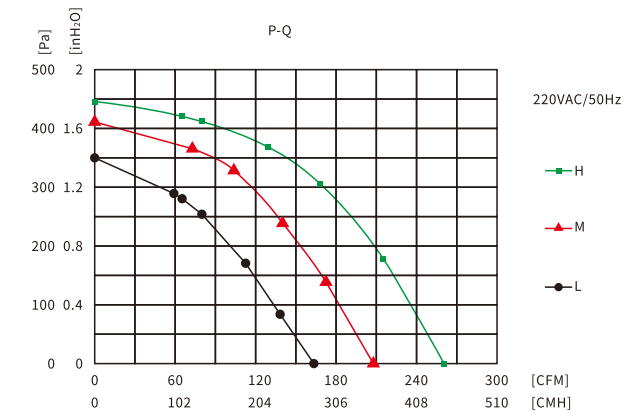

Material: Impeller made of PA6+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用PA6+25%GF制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Gear	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC160A1-068-005	AE068A1-00021	220	50	5//450	H	260	2200	99	0.50	65
					M	208	1980	85	0.46	62
					L	160	1650	80	0.43	57

