



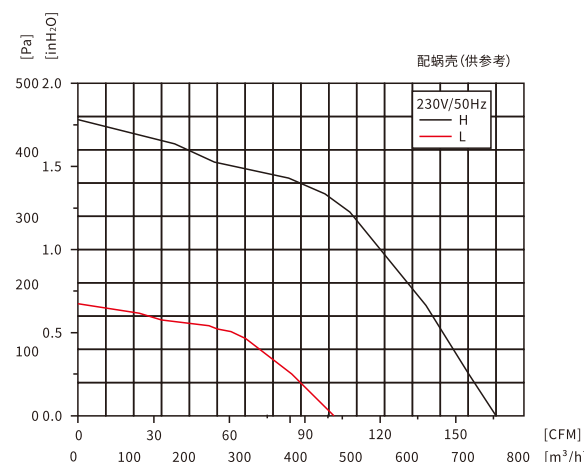

Material: Impeller made of PA+SGCC, Black
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA+SGCC, 黑色
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC150A1-068-000	AM068.000.0A.100	1~220	50(H)	(749)	(441)	2520	97	0.45	64	2.5/450
			50(L)	(461)	(271)	1850	82	0.38	57	

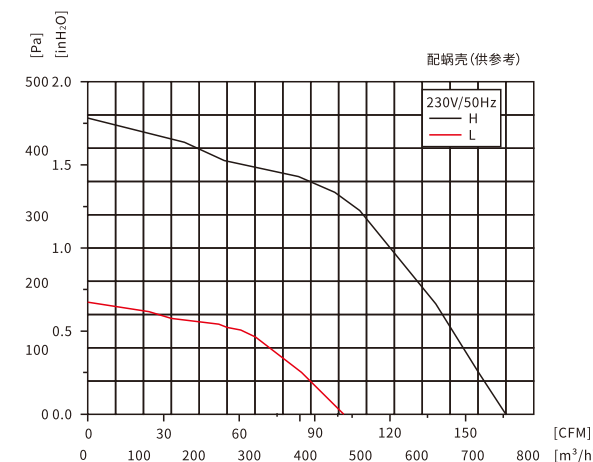

Material: Impeller made of PA+SGCC, Black
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals:CCC
Amb.Temp:-40°C~+65°C

材料:风轮采用PA+SGCC, 黑色
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC150A1-068-001	AM068.000.0A000	1~220	50(H)	(579)	(341)	2520	68	0.31	59	2/450
			50(L)	(351)	(207)	1412	48	0.23	54	

