



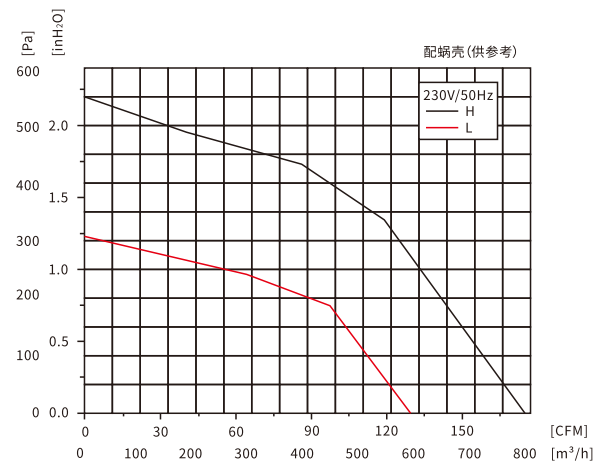

Material: Impeller made of SPCC, Black electrophoresis
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料:叶轮由SPCC材料制成, 黑色电泳
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC160A1-068-001	AE068.000.09Y00	1~220	50(H)	(785)	(462)	2250	205	0.94	63	6/450
			50(L)	(585)	(344)	1350	110	0.57	51	

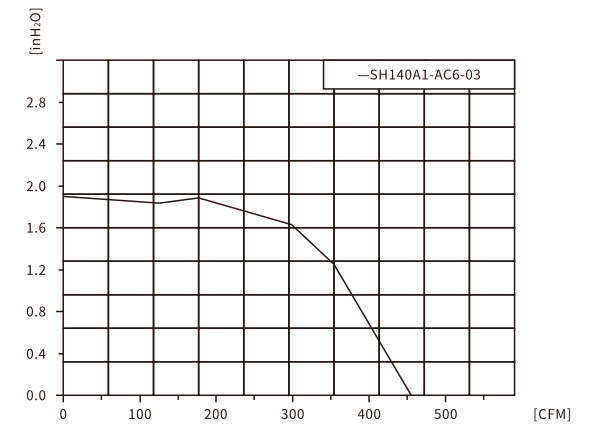

Material: Impeller made of SPCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CCC, CE
Amb.Temp: -40°C~+65°C

材料:叶轮由SPCC制成电机
防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SH140A1-AC6-03	FW068-0352E48	115	60	16/250	460	271	1980	180	1.57	67

