

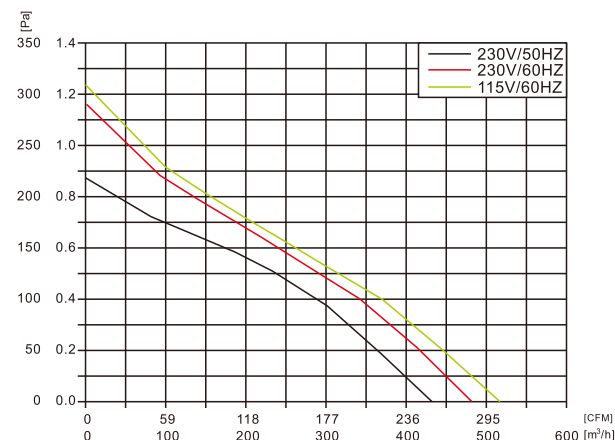


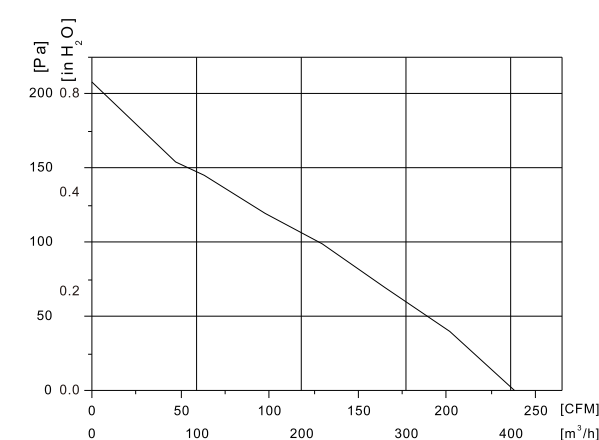

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: UL
Amb. Temp: -40°C ~ +65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: UL
工作温度范围: -40°C ~ +65°C

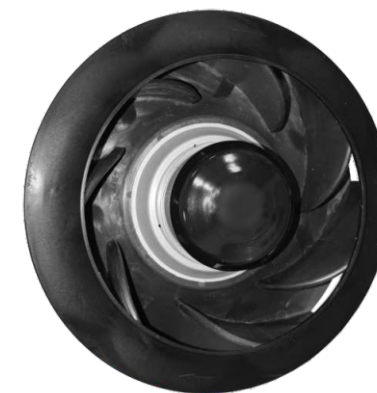

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anticlockwise see on the leads
Approvals: CCC
Amb Temp: -40°C ~ +65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)	Capacitor (μF/V)
SC175A1-AC6-00	AM052A1-AC6-01	115	60	500	296	2800	38	0.33	67	4/250

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)	Capacitor (μF/V)
SC175C1-AF5-00	FW052-0252B05	220	50	396	234	2360	61	0.4	63	/

