



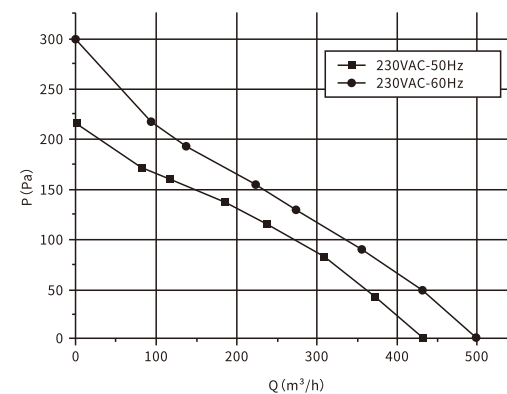

Material: Impeller made of plastic PA66+25%GF
Type of protection: IP44
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 风轮采用PA66+25%GF塑料材料制成
电机防护等级: IP44
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC175A1-AGT-03	AM052A1-AGT-04	230	50/60	4/250	430/500	253/294	2500/2800	43/40	0.22/0.18	≤63/67

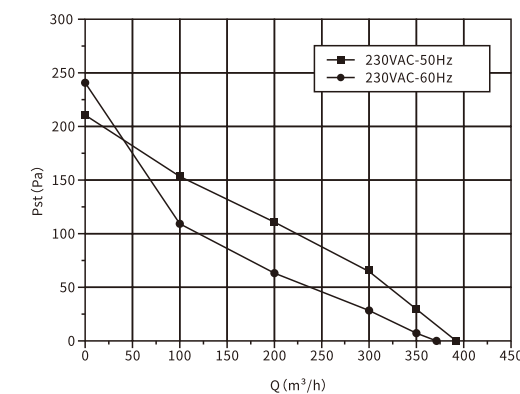

Material: Impeller made of plastic PA66+25%GF, material accord with UL-V1
Type of protection: IP20
Bearing: Ball bearing
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料: 叶轮由PA66+25%GF塑料材料制成, 材料符合UL-V1
电机防护等级: IP20
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC、CE
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC175C1-AGT-03	FW052-0252B01	230	5/60	/	390/340	229/200	2350/2200	61/62	0.39/0.34	≤64

