

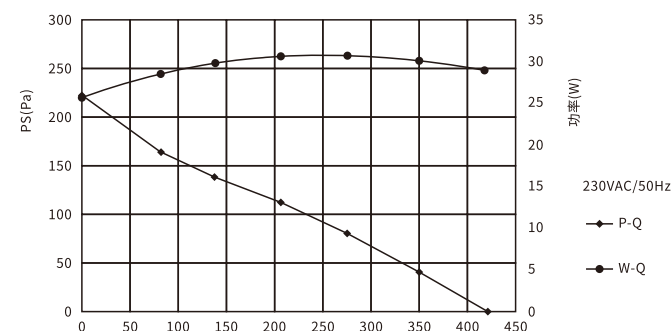


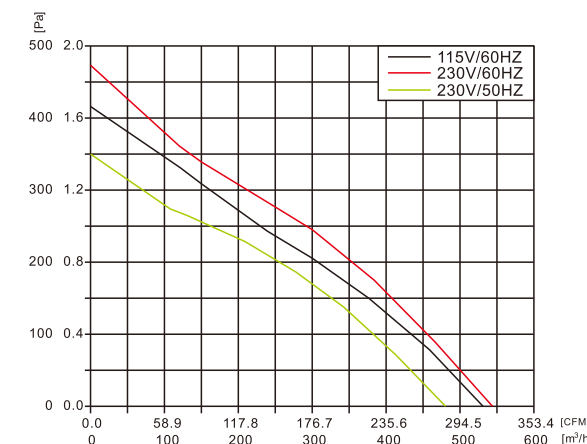

Material: Impeller made of plastic PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF材料制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE, CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC175A1-AGT-04	AE052A1-0000	230	50	3/450	420	247	2220	28	0.12	57

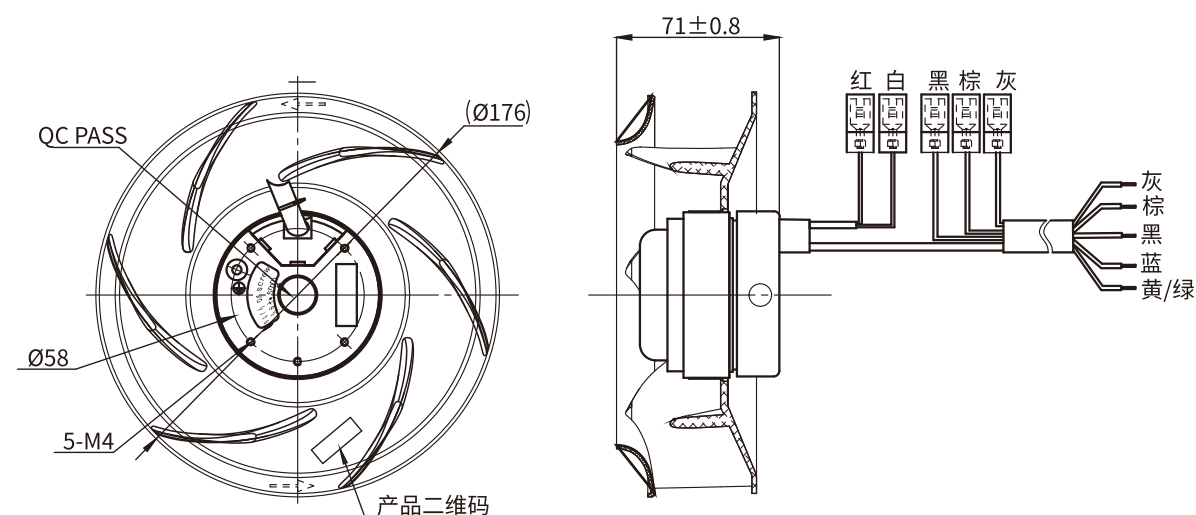

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: U anticlockwise see on the leads
Approvals: UL
Amb Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:UL
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC190A1-AC6-12	FW068-015E02	115	60	520	306	2590	65	0.56	70	6/250

