



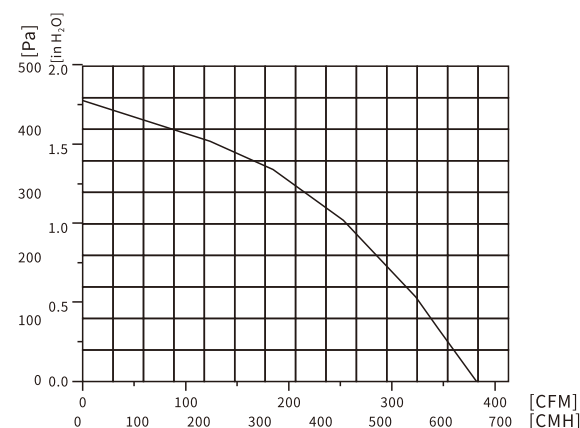

Material: Impeller made of plastic
Type of protection: IP44
Bearing: Ball bearing
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料: 叶轮由塑料制成
电机防护等级: IP44
轴承: 滚珠轴承
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

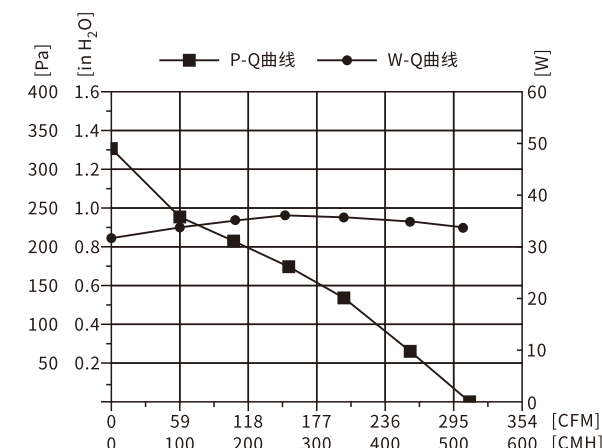

Material: Impeller made of PA66+25%GF
Type of protection: IP42
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 叶轮由PA66+25%GF材料制成
电机防护等级: IP42
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -40°C~65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC175E2-055-000-101	DM055E2-00001	230	50/60	690	406	3500	65	0.5	68

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC175F2-055-000	DM055F2-00007-001	24	/	/	500	294	3000	37.5	1.55	65

