

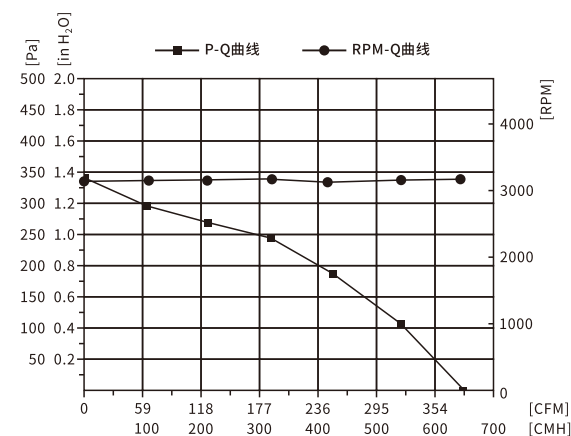
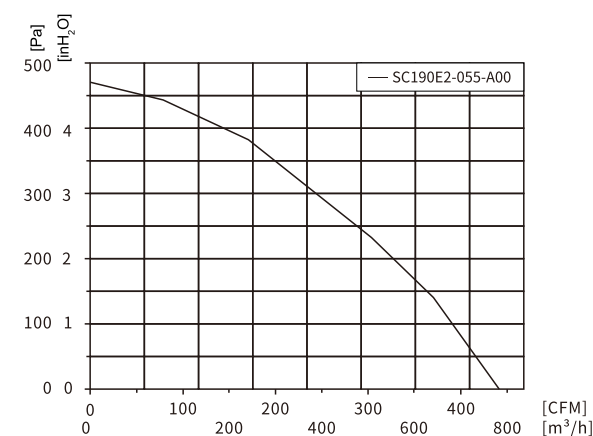


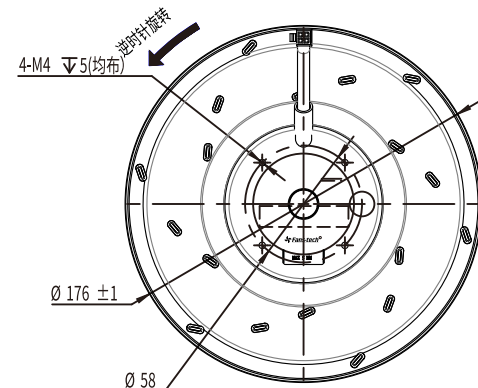

Material: Impeller made of ABS+10%GF
Type of protection: IP20
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb. Temp: -40°C ~ +65°C

材料: 叶轮由ABS+10%GF材料制成
电机防护等级: IP20
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC175F2-055-001	DE055F2-0000K-001	24	/	/	640	376	3000	38.5	1.6	65

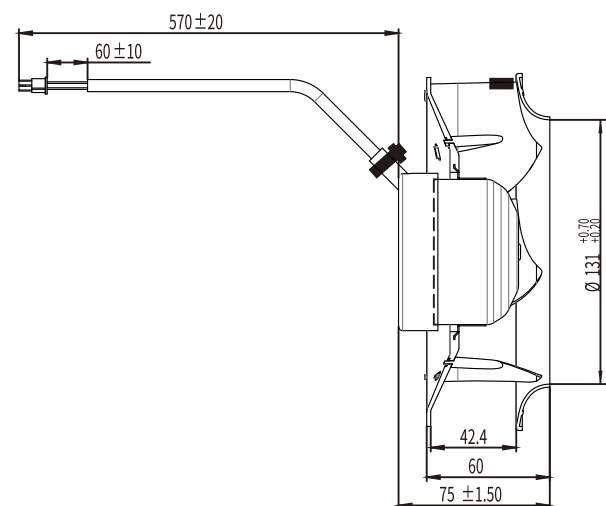

Material: Impeller made of plastic PA66
Type of protection: IP42
Bearing: Ball bearing
Technical features: Control input 0-10VDC / PWM, Tach output
Protection: Locked-rotor protection, Current limited, Under-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -25°C ~ +60°C

材料: 风轮采用PA66制成
电机防护等级: IP42
轴承: 滚珠轴承
电气性能: 控制型号输入0-10VDC/PWM, 速度反馈信号
保护: 堵转保护、限流保护、低电压和过电压停止运转保护、软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE, CCC
工作温度范围: -25°C ~ +60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC190E2-055-A00	DE055E2-A0000	1~230	50/60	720	424	3150	68	0.55	65

