





AC Centrifugal Blower Forward Curved
AC 前向式离心风机φ180

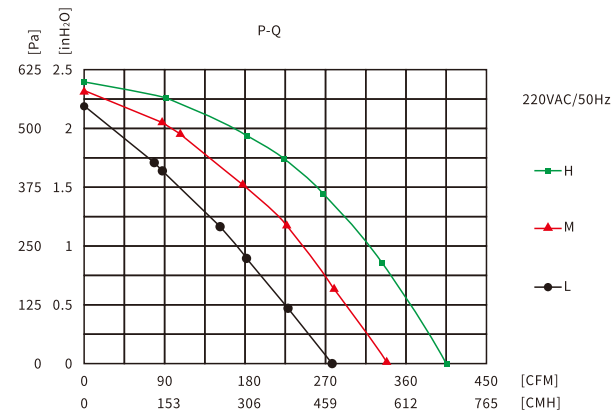


Material: Impeller made of SPCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Gear	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC180A1-068-000	AE068A1-00022	220	50	6//450	H	405	1990	203	0.92	65
					M	340	1750	163	0.79	62
					L	272	1470	139	0.7	57

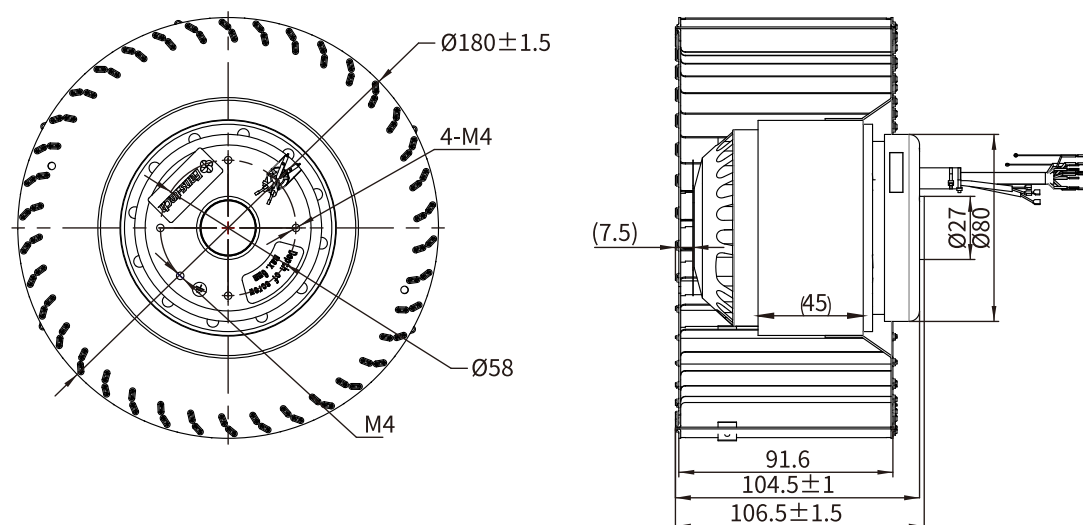

AC Duct Fan
AC 球形风机φ100

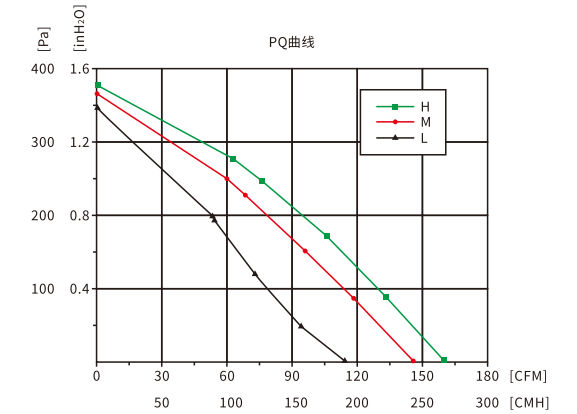

Material: Impeller made of plastic ABS+10%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Soft start, Over-current protect, Locked-rotor protect
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -25°C~+50°C

材料:风轮采用ABS+10%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:软启动、过流保护、堵转保护
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-25°C~+50°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m ³ /h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
DF100A1-068-A00	AE068A1-00018	230	50	1/450	260/240 /180	153/141 /106	2700/2450 /1800	42/44/47	0.19/0.19 /0.2	61/59/54

