

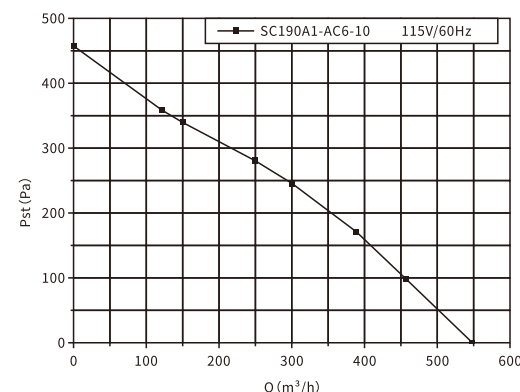


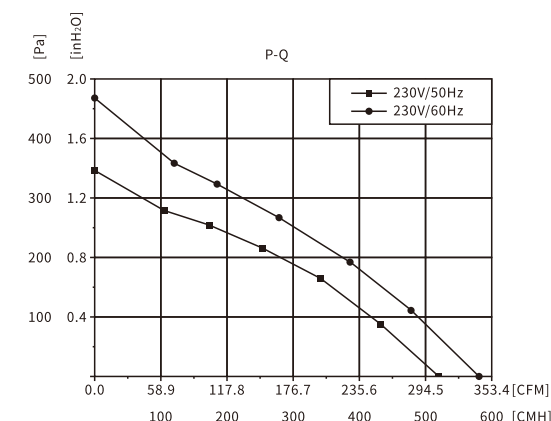

Material: Impeller made of plastic PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals:CCC
Amb.Temp:-40°C~+65°C

材料: 风轮采用PA66+25%GF塑料制成
电机防护等级:IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级:F级
转向: 从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC190A1-AC6-10	FW068-0202E11	115	60	8/250	550	324	2950	99	0.88	≤69

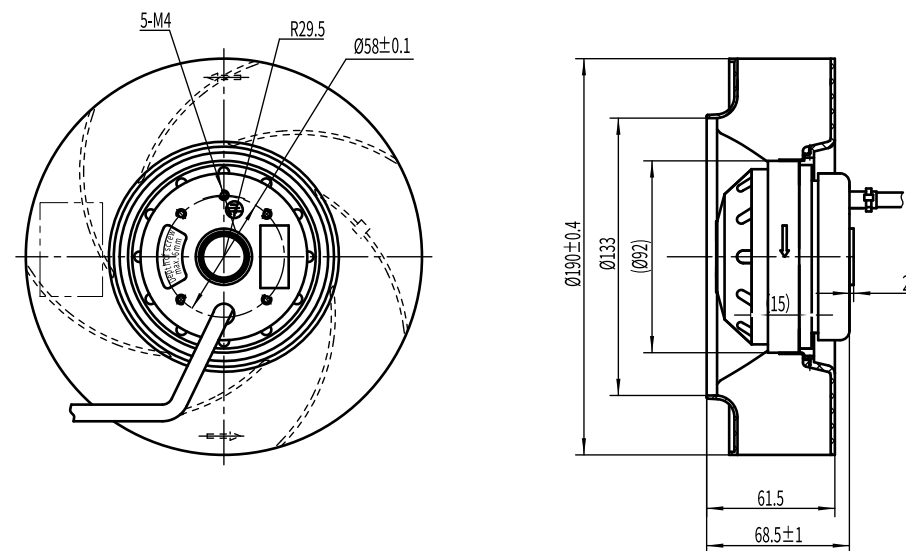

Material: Impeller made of PA+SGCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: U anticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料: 叶轮由PA+SGCC材料制成
电机防护等级:IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级:F级
转向: 从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC190A1-AGT-17	AM068A1-AGT-59	230	50/60	3/450	520/580	306/341	2630/2980	79/108	0.35/0.48	72/75

