

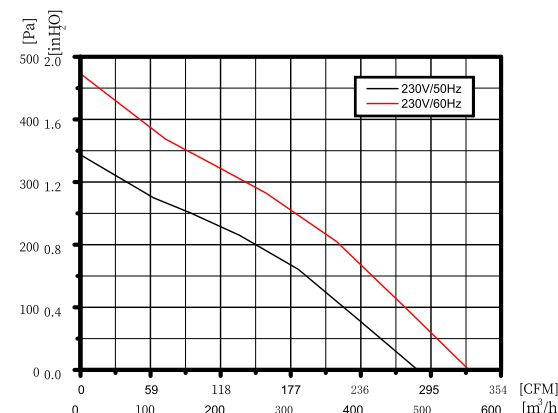
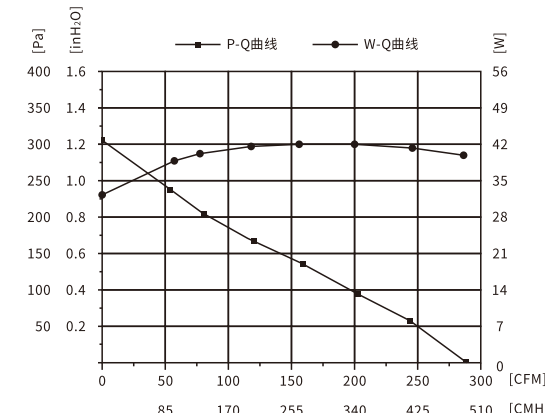


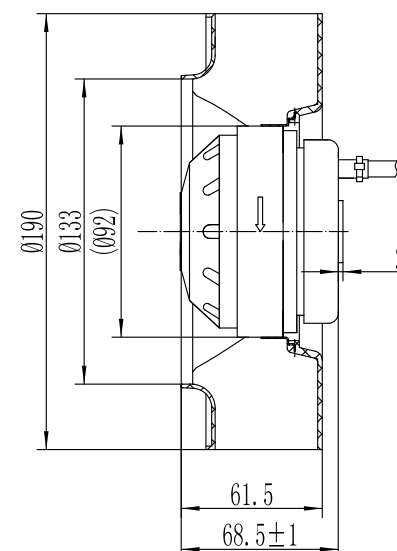

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC
Amb. Temp: -40°C ~ +65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)	Capacitor (μF/V)
SC190B1-AQT-01	AM068B1-AQT-03	3~400	50	460	271	2600	61	0.14	66	/
			60	530	312	2950	87	0.15	70	

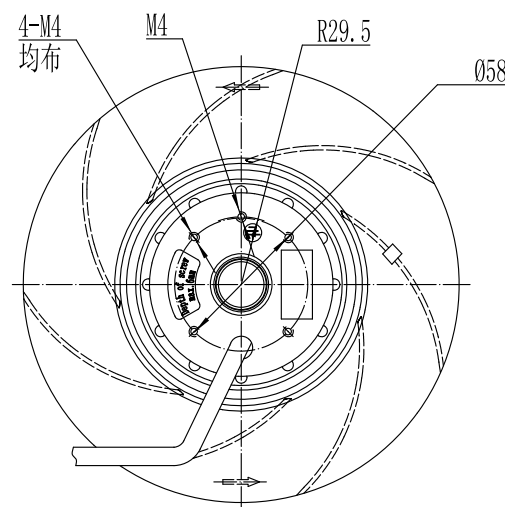

Material: Impeller made of ABS+SGCC
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal Overload Protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C ~ +65°C

材料: 叶轮由ABS+SGCC材料制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC190A1-AF5-01	AM068A1-AF5-84	220	50	1/450	480	282	2250	40	0.19	60

