

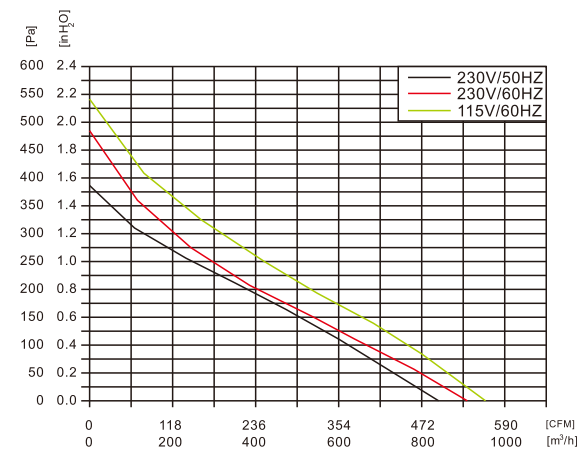


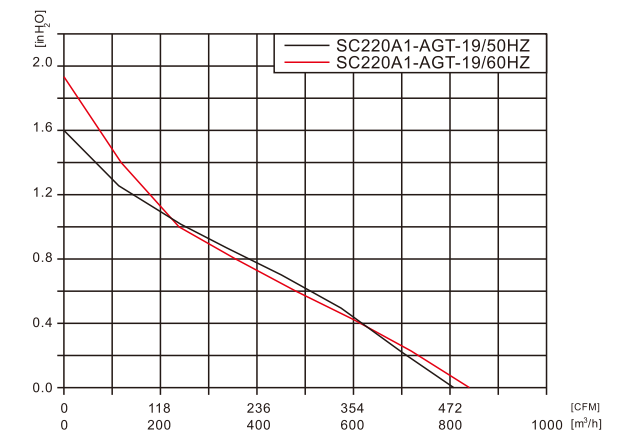

Material: Impeller made of plastic PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector(TOP)wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC, CE, UL, CUL
Amb Temp: -40°C~+65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC、CE、UL、CUL
工作温度范围: -40℃~+65℃

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp,dB(A)	Capacitor (μ F /V)
SC220A1-AC6-07	AM068A1-AC6-19	115	60	970	542	2800	134	1.1	75	10/250
SC220A1-AGT-03	FW008-0202E02	230	50/60	750/808	442/472	2460/2650	90/120	0.39/0.53	72/74	3/450

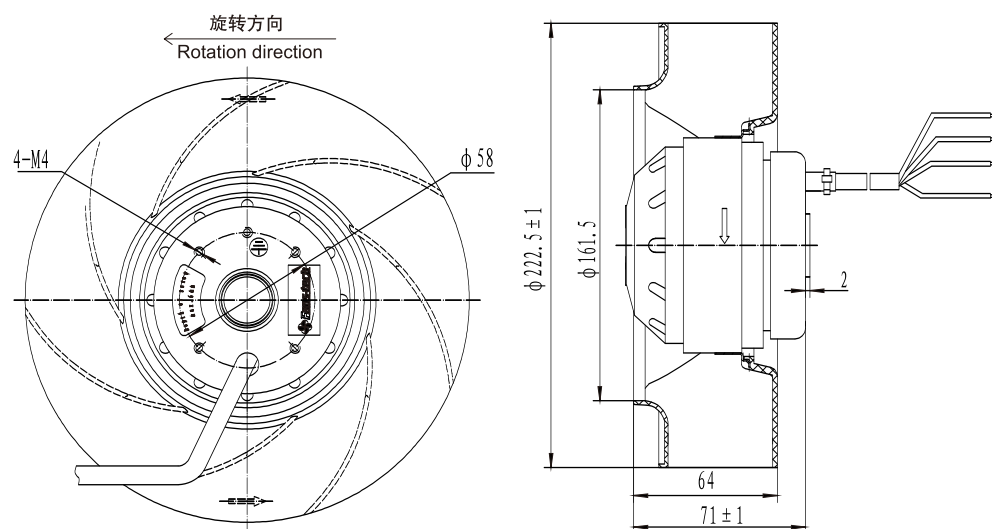

Material : Impeller made of plastic PA66
Type of protection : IP23
Bearing : Ball bearing
Operation Mode : (S1)
Protection : Thermal Overload Protector(TOP) wired internally
Motor Insulation Class : F
Direction of rotation : Unticlockwise see on the leads
Approvals : CCC
Amb Temp : -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40℃~+65℃

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (µ F /V)
SC220A1-AGT-19	AM068A1-AGT-67	230	50/60	800/820	471/489	2320/2360	83/102	0.37/0.44	65	2/450

