

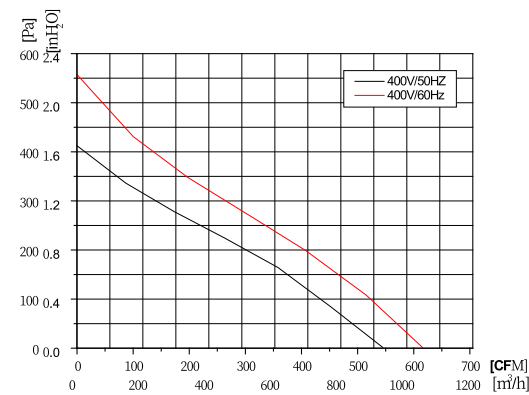


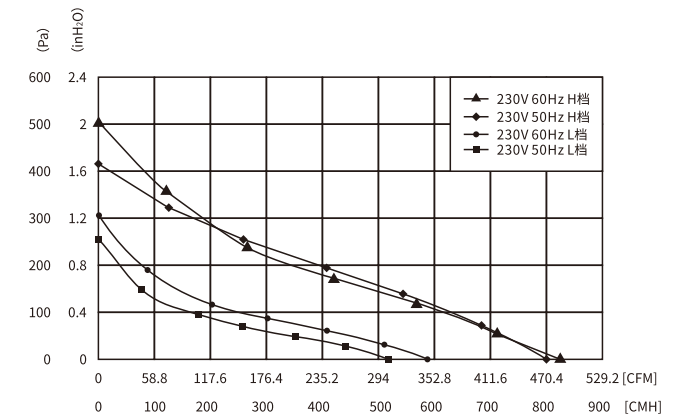

Material: Impeller made of plastic PA66
Type of protection: IP44
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: UL
Amb Temp: -40°C ~ +65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP44
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: UL
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC220B1-AQT-01	AM068B1-AQT-04	3~400	50	880	518	2500	90	0.2	71	/
		3~460	60	1000	589	2800	128	0.21	75	

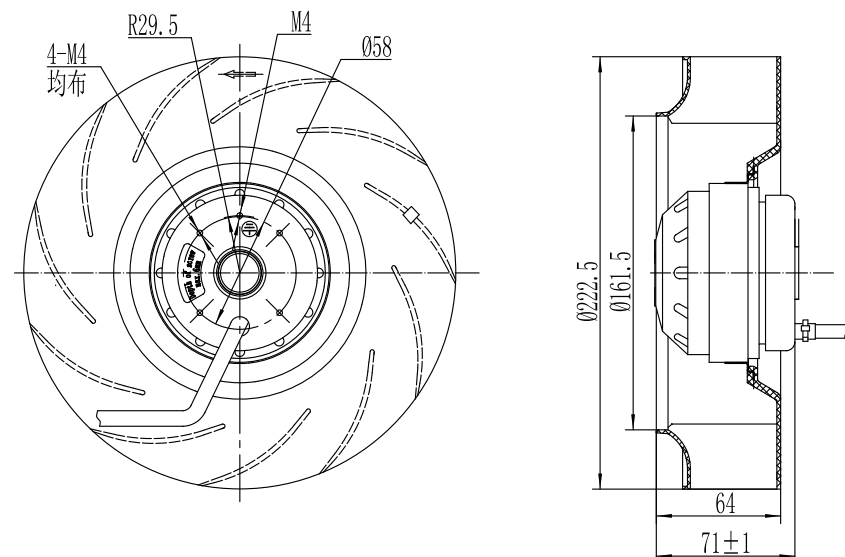

Material: Impeller made of SGCC+PA
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Soft start, Current limited, Under-voltage and over-voltage lockout protection, Locked-rotor protect
Motor Insulation Class: F
Direction of rotation: Anticlockwise see on the leads
Approvals: CCC, CE
Amb Temp: -40°C ~ +65°C

材料: 风轮采用镀锌板+PA塑料材料制成
电机防护等级: IP23
轴承: 滚珠轴承
保护: 软启动、限流保护、欠压与过压停止运转保护、堵转保护
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC、CE
工作温度范围: -40°C ~ +65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC220A1-AGT-22	AM068A1-AGT-86	230	50/60	2/450	800/830	471/488	2370/2450	75/95	0.33/0.41	72/67

