

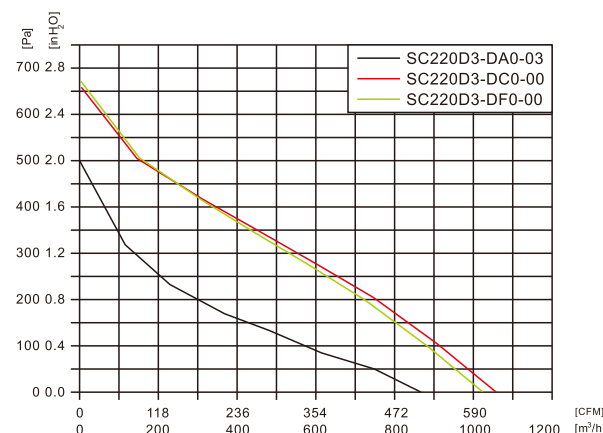


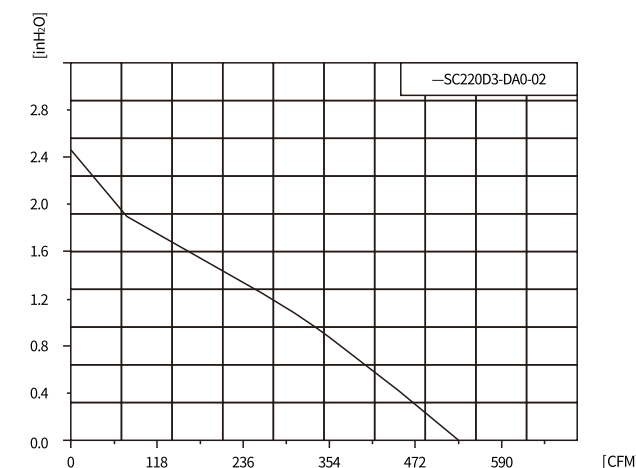

Material: Impeller completely made of plastic PA66
Type of protection : IP44
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads.
Approvals: CCC, CE
Amb Temp: -25°C~+60°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP44
电气特性: 采用0~10VDC控制电压或脉宽调制
轴承: 滚珠轴承
保护: 具有速度反馈输出、堵转、限流保护和软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC、CE
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC220D3-DA0-03	DM075D3-DA0-01	12	/	770	453	2300	48	4	70
SC220D3-DC0-00	M1D075-AB01-01	24	/	930	547	3130	106	4.4	74
SC220D3-DF0-00	DM075D3-DF0-01	48	/	1080	636	3130	106	2.1	79

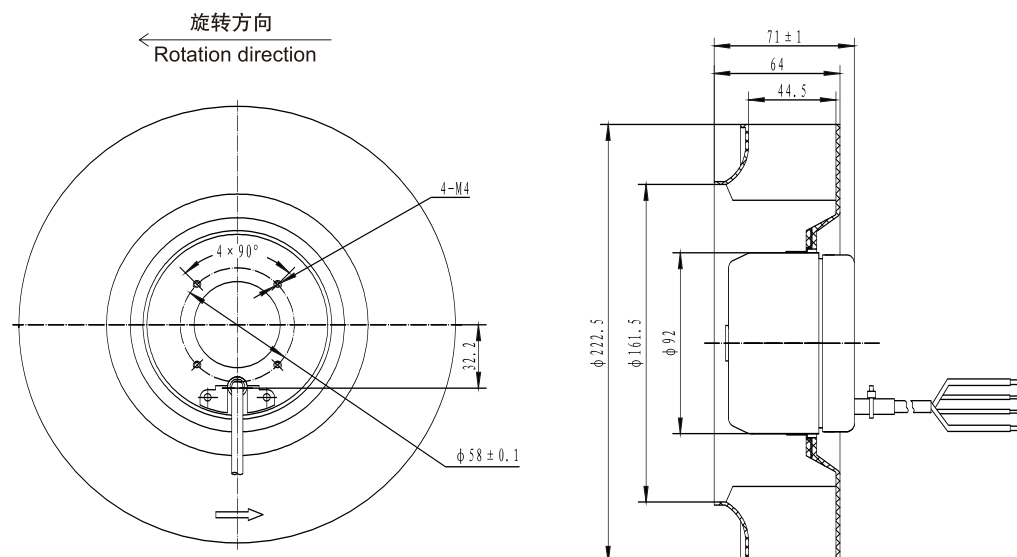

Material: Impeller completely made of plastic PA66+25%GF
Type of protection: IP42
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC
Amb Temp: -40°C~+60°C

材料: 叶轮由PA66+25%GF材料制成
电机防护等级: IP42
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针产品
符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC220D3-DA0-02	DM75D3-DA0-05	12	/	/	900	529	2780	81	6.7	76

