



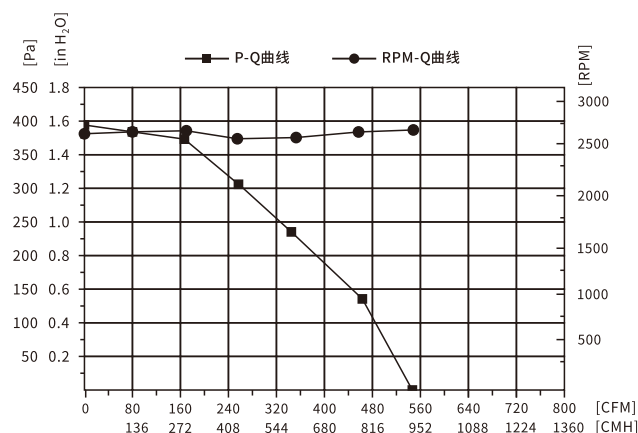

Material: Impeller made of PA66+25%GF
Type of protection: IP42
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料:叶轮由PA66+25%GF材料制成
电机防护等级:IP42
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE, CCC
工作温度范围:-40°C~+65°C

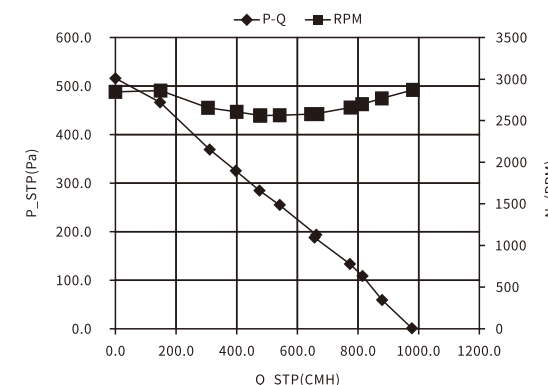

Material: Impeller made of PA66+25%GF
Type of protection: IP42
Bearing: Ball bearing
Protection: Thermal overload protector(TOP)wired internally
Motor Insulation Class: F
Direction of rotation: Anticlockwise, see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF制成
电机防护等级:IP42
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE, CCC
工作温度范围:-40°C~65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC220E2-055-001	DE055E2-00007	230	50/60	/	920	541	2650	74	0.6	71

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC220E2-055-002	DE055F2-0000G	230	/	/	1000	588	2800	85	0.6-0.8	69

