

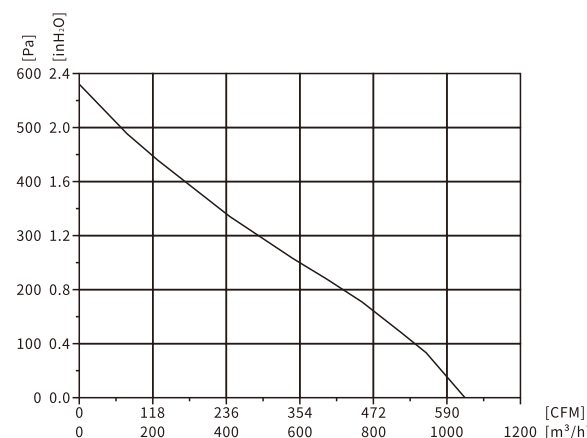


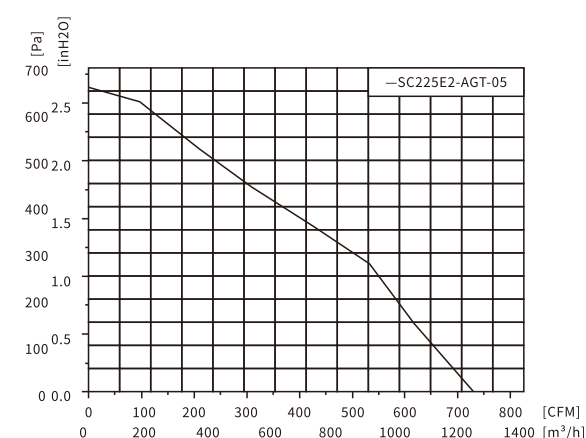

Material: Impeller made of PA66+25%GF
Type of protection: IP44
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb.Temp: -40°C~+65°C

材料: 叶轮由PA66+25%GF材料制成
电机防护等级: IP44
轴承: 滚珠轴承
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC220E2-AGT-01	DM055E2-AGT-03	230	50/60	/	1050	618	3000	105	0.8	77

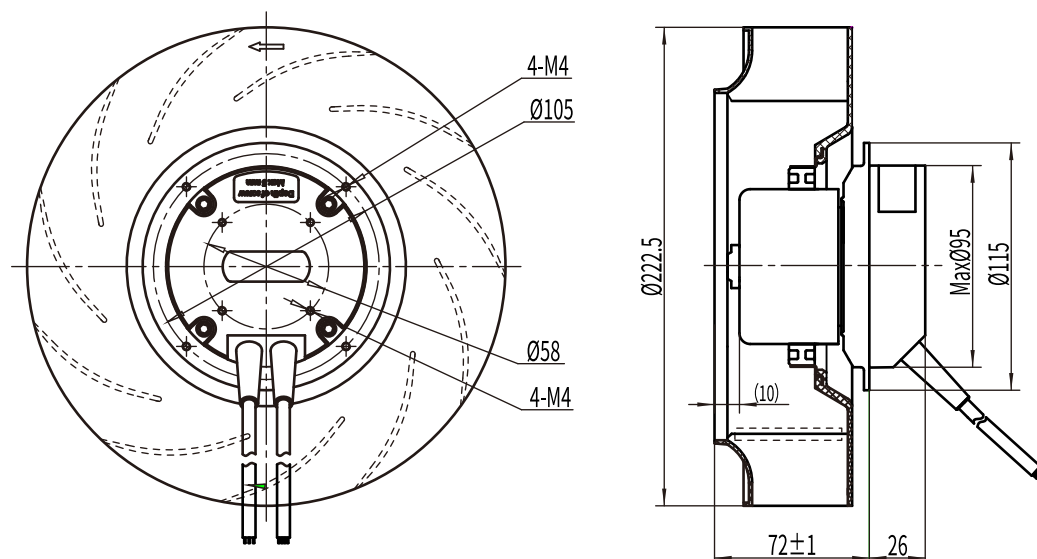

Material: Impeller made of plastic PA66
Type of protection: IP54
Bearing: Ball bearing
Technical features: Control input 0-10VDC/PWM, Tach output
Protection: Locked-rotor protection, Current limited, Under-voltage and over-voltage lockout protection, Soft start
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE, CCC
Temp: -25°C~60°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP54
轴承: 滚珠轴承
电气性能: 控制型号输入0-10VDC/PWM, 速度反馈信号
保护: 堵转保护、限流保护、低电压和过电压
停止运转保护、软启动
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CE、CCC
工作温度范围: -25°C~60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp: dB(A)
SC225E2-AGT-05	DM055E2-DH0-04	1~230	50/60	1220	718	3200	135	1.03	78

