

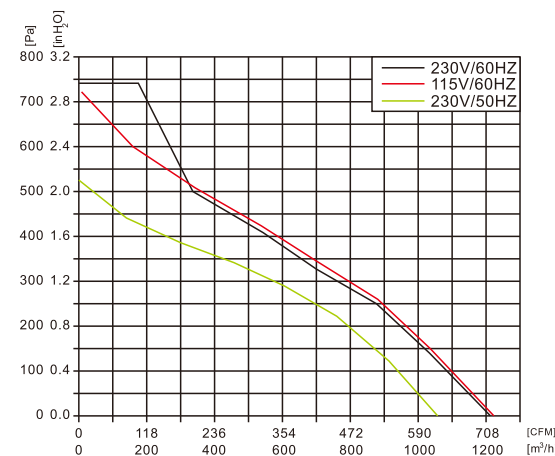


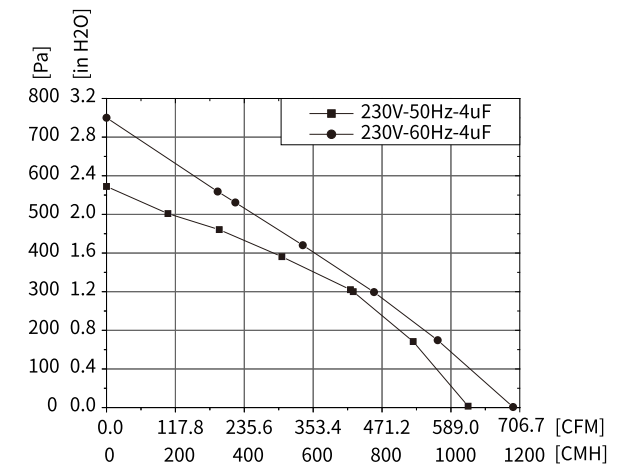

Material: Impeller made of PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC, CE, UL, CUL
Amb.Temp: -40°C~+65°C

材料: 风轮采用PA66塑料制成
电机防护等级: IP23
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC, CE, UL, CUL
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC225A1-AC6-06	FW068-0452E05	115	60	1250	740	3050	180	1.7	75	20/250
SC225A1-AGT-13	FW068-0452E04	230	50/60	1100/1250	651/740	2680/3100	147/195	0.8/0.86	71	5/450

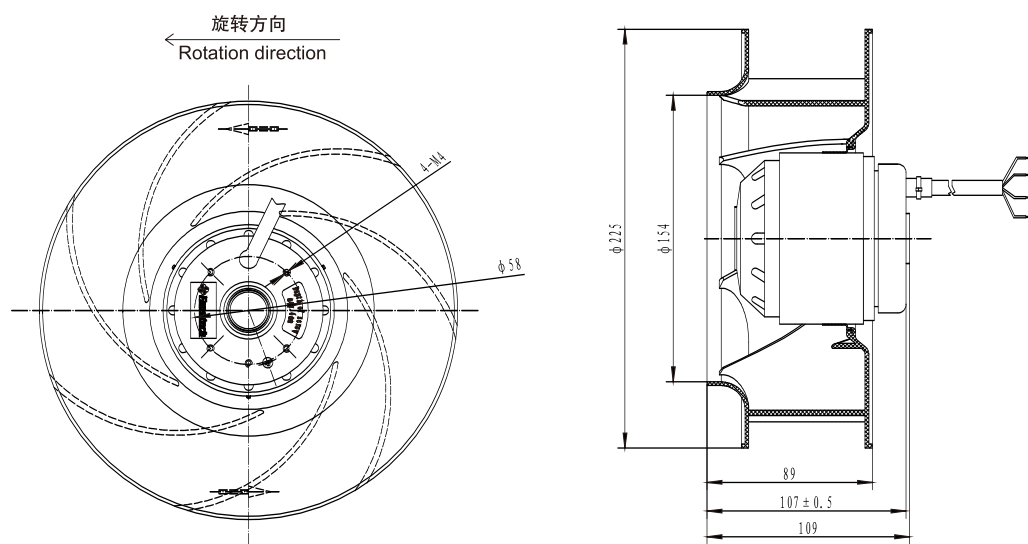

Material: Impeller made of PA66
Type of protection: IP54
Bearing: Rolling bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料: 风轮采用塑料PA66制成
电机防护等级: IP54
轴承: 滚珠轴承
连续工作制: (S1)
保护: 具有可恢复性热保护功能
绝缘等级: F级
转向: 从引出线看为逆时针
产品符合的认证: CCC, CE
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC225A1-068-00E	AE068A1-00031	230	50	4600	618.38	920	143	0.623	80

