



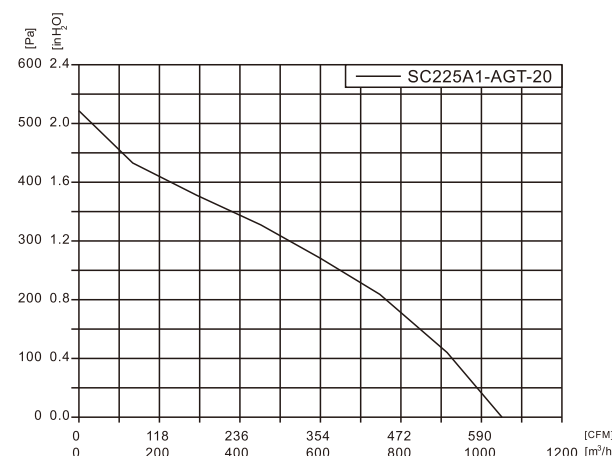

Material: Impeller made of PA66
Type of protection: IP23
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC
Amb.Temp: -40°C~+65°C

材料:风轮采用PA66塑料制成
电机防护等级:IP23
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

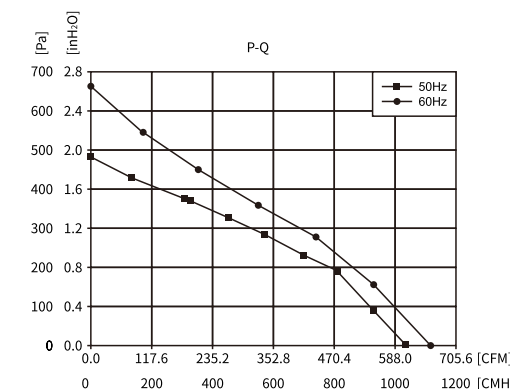

Material: Impeller made of PA66+25%GF
Type of protection: IP23
Bearing: Ball bearing
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: F
Direction of rotation: U anticlockwise, see on the leads
Approvals: CCC、CE
Amb Temp: -25°C~+65°C

材料:风轮采用塑料PA66+25%GF制成
电机防护等级:IP23
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μF/V)
SC225A1-AGT-20	FW068-0352E03	230	50	1070	630	2650	141	0.7	79	4/450

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC225A1-068-0NN	AM068A1-00019	230	50/60	5/450	1030/1100	605/647	2500/2850	140/200	0.61/0.89	67/70

