

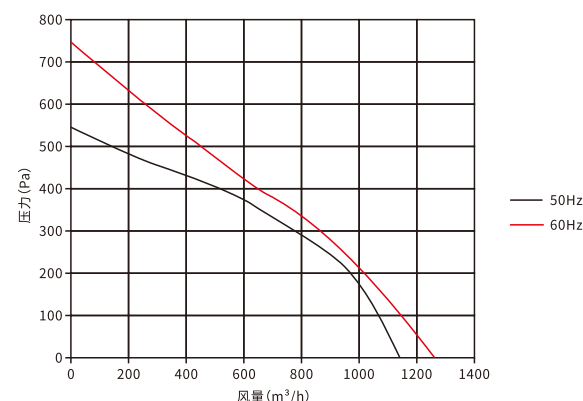


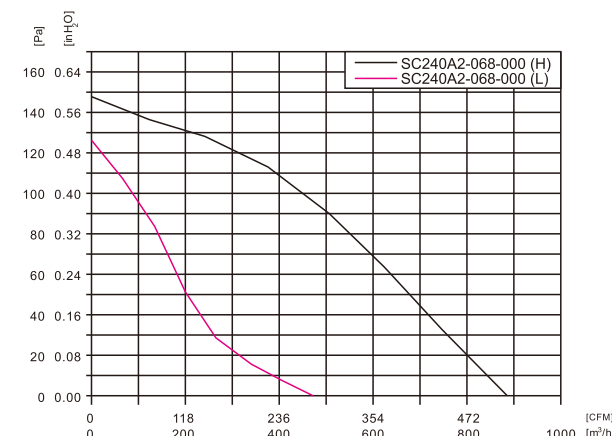

Material: Impeller made of PA66+25%GF
Type of protection: IP44
Bearing: Ball bearing
Protection: Thermal Overload Protector(TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC, CE
Amb Temp: -40°C~+65°C

材料:风轮采用PA66+25%GF制成
电机防护等级:IP44
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证: CCC、CE
工作温度范围: -40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μ F/V)	Airflow (m^3/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC225A1-068-001	AE068A1-0000F	230	50/60	4/450	1150/1270	676/747	2580/2710	146/201	0.64/0.88	68/70

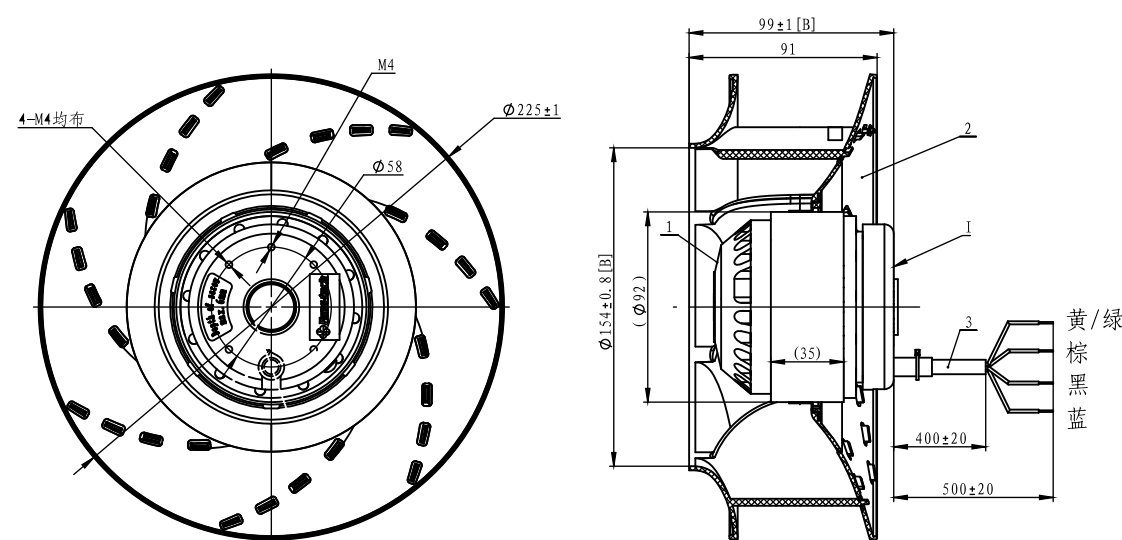

Material: Impeller made of ABS+10%GF
Type of protection: IP24
Bearing: Ball bearing
Operation Mode: (S1)
Protection: Thermal Overload Protector(TOP) wired internally
Motor Insulation Class: B
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC
Amb Temp: -25°C~+50°C

材料:风轮采用塑料ABS+10%GF塑料制成
电机防护等级:IP24
轴承:滚珠轴承
连续工作制:(S1)
保护:具有可恢复性热保护功能
绝缘等级:B级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围: -25°C~+50°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	2 Speeds	Airflow (m^3/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (μ F /V)
SC240A2-068-000	AM068A2-AF5-11	220	50	H	800	471	1260	52	0.3	51	3/450
				L	520	306	840	31	0.21	40	3/450

