

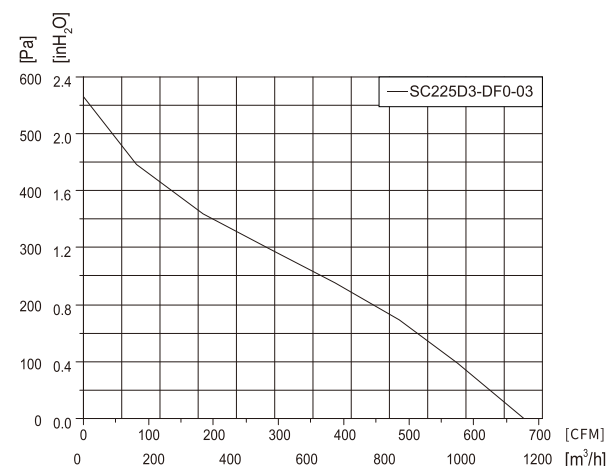


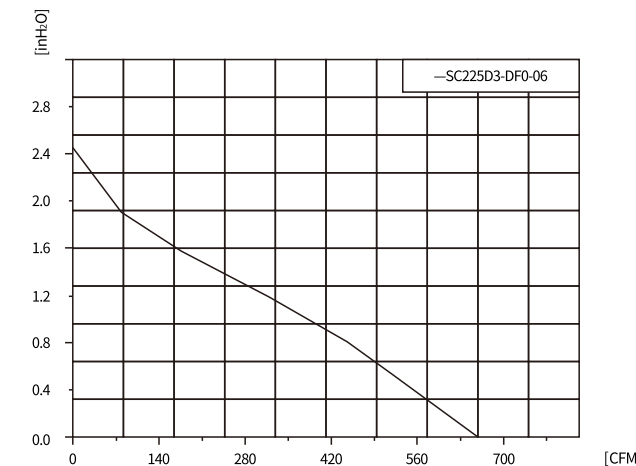

Material: Impeller completely made of plastic PA66
Type of protection : IP44
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads.
Approvals: CCC, CE
Amb Temp: -25°C~+60°C

材料:风轮采用PA66塑料制成
电机防护等级:IP44
电气特性:采用0~10VDC控制电压或脉宽调制
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护和软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC、CE
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC225D3-DF0-03	DM075D3-DF0-29	48	/	1100	647	2700	84	1.75	78

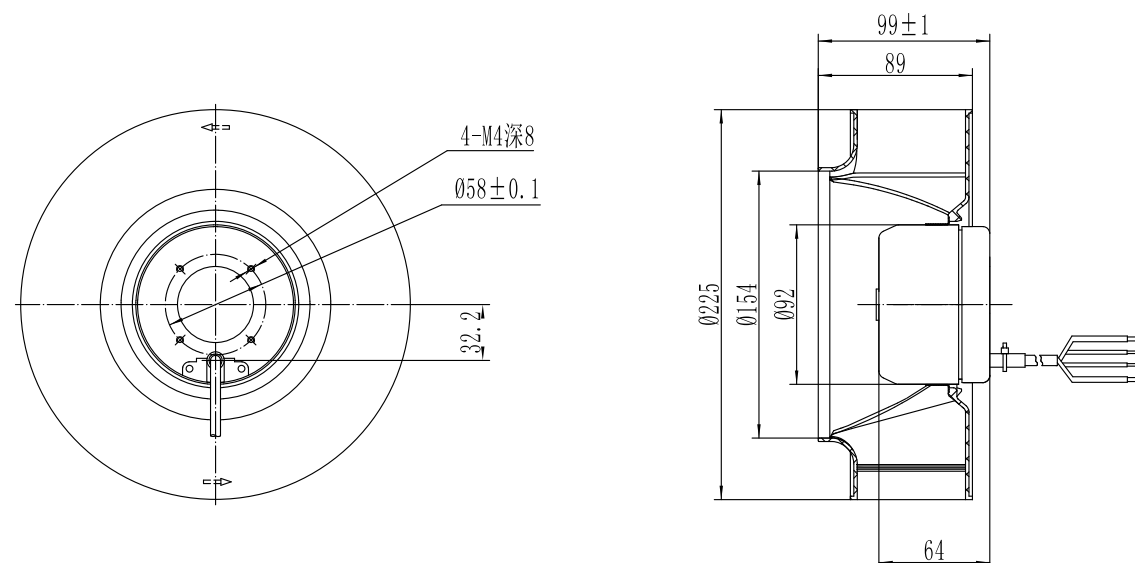

Material: Impeller completely made of plastic PA66+25%GF
Type of protection: IP44
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Insulation Class: F
Direction of rotation: Anti-clockwise see on the leads
Approvals: CCC
Amb. Temp: -40°C~+60°C

材料:叶轮由PA66+25%GF材料制成
电机防护等级:IP44
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Capacitor (μF/V)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
SC225D3-DF0-06	DM75D3-DF0-29	48	/	/	1100	647	2700	84	1.75	67

